




Metal butterfly valves DN 15 - DN 50

GEMÜ 411 / 415 / 428

Operator:	GEMÜ 411: manually operated
	GEMÜ 415: pneumatically operated Normally closed (NC), Double acting (DA)
	GEMÜ 428: motorized 12/24V DC, 12/24V AC 50/60 Hz, 100-250V AC 50/60 Hz
Max. operating pressure:	10 bar
Max. operating temperature:	100° C
Seal material:	FPM, silicone, EPDM
Disc material:	Brass, st. steel investment casting 1.4581
Valve body material:	Brass, st. steel investment casting 1.4581
Connections:	Brass: Threaded sockets Stainless steel: Butt weld spigots

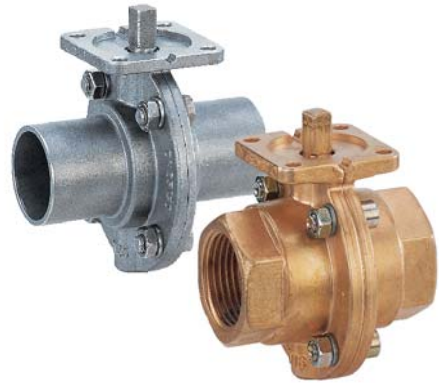

GEMÜ 411
manually operated



GEMÜ 415
pneumatically operated



GEMÜ 428
motorized