

Fig. 991 - Fast Attach — Cable Sway Brace Attachment

Size Range — 1/8", 3/16" and 1/4" pre-stretched cable. Fits rod size 3/8" thru 3/4".

Material — Carbon Steel

Function — Cable attachment for sway bracing. Attaches sway brace to hanger rod. To be used with 7 x 19 strand core pre-stretched galvanized aircraft cable.

Features — Fits multiple sizes of cable. Cable easily slides into oversized front arch opening. Swivel allows adjustment to various surface angles. Break-away hex nuts assure verification of proper installation torque. Unique "Fast-Attach" yoke design allows Fig. 991 to be installed using hanger rods 3/8" through 3/4" in size. "Stackable" design allows installation of both lateral and longitudinal braces, as well as opposing braces, to be easily installed on a single hanger rod, with no disassembly. The retrofit yoke has a visual verification of proper installation torque. Tighten existing hex nut down until the slight gap in the yoke assembly closes completely.



Approvals — Included in our Seismic Restraints Catalog approved by the State of California Office of Statewide Health Planning and Development (OSHPD). For additional load, spacing and placement information relating to OSHPD projects, please refer to the TOLCO Seismic Restraint System Guidelines.

Finish — Electro-Galvanized

Order By — Figure number, rod size 3/8" through 3/4"

Pat. # 7,097,141, Pat. # 7,654,043, Pat. # 7,654,043 B2

Component of State of California OSHPD Approved Seismic Restraints System

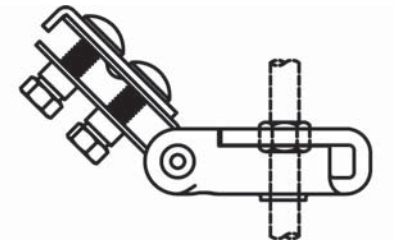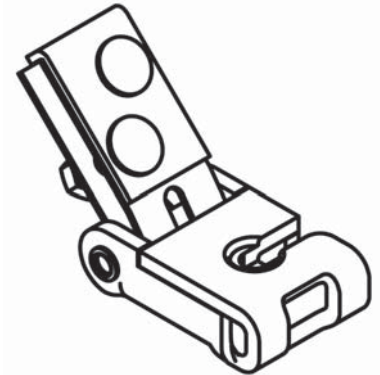

Dimensions • Weights			
Cable Diameter	A	B	Maximum Design Load Lbs.
1/8	5 3/4	2 1/8	975*
3/16	6 3/4	2 1/2	2050*
1/4	6 3/4	2 1/2	3150*

* Maximum load rating controlled by cable breaking strength.

