Slotted Fume Hoods

OVERVIEW:

Slotted Fume Hoods are available in a vast array of sizes with numerous accessories. Side skirts are a common addition. The hood may also be connected to a welding table. A stainless steel construction is an option. Also, larger sizes are an option.

FEATURES:

- Typical hood depth: 6" for standard models
- Standard offering includes 34", 46" and 58" wide SFH models
- Custom design available

BENEFITS:

• Air pattern pulls

harmful fumes and particulate from breathing zone

Standard

SFH-34

SFH with Table

and Side Skirts

- Allows for table or wall mount in confined spaces
- Options include table, side skirts, adjustable slot design, stainless steel construction

APPLICATIONS:

• Welding, Metal grinding, Trade Schools, Fume Capture, Light Dust and Particulate





Custom Fabrication


OVERVIEW:

Monoxivent's custom design team helps customers from initial design to delivery. The Crawford/Monoxivent team of designers and fabricators utilize the company's three lasers, CNC punching capabilities, metal forming options, and top-tier welders. Custom processes may be implemented on a majority of products in Monoxivent's standard catalog and some entirely unique applications.

Some examples include:

- Oversized, custom hose reels (up to 18" diameter hose, 7' drum width)
- Custom slotted fume hoods
- Rail and gantry systems for vehicle exhaust and welding applications
- Oversized exhaust hoods
- Hose reels on boom arms
- Custom cartridge collectors
- Stainless steel exhaust stacks
- Other examples on-line at <u>monoxivent.com</u> - click Application Spotlights



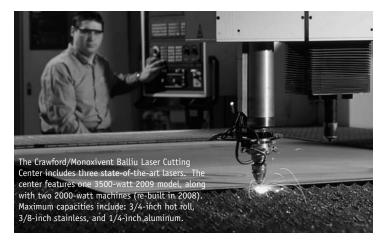





www.monoxivent.com info@monoxivent.com