



Figure 100* | 1,000 PSI CWP — 1,500 PSI TEST

Low pressure service. Manifold and general service. Female threaded ends. 2 available with 8RD thread. Consult factory.




Size	IN	MM	Weight Lbs	Dimensions			TPI	Material	
				A	B	C+		Nuts	Subs
2	50	6.25	3.940	2.840	6.250	3 MOD	DI	DI	
2½	65	10.05	4.490	3.390	7.925	3 MOD	DI	DI	
3	80	13.65	5.000	4.030	9.000	3 MOD	DI	DI	
4	100	22.00	5.940	5.230	10.560	3 MOD	DI	DI	
6	150	45.85	6.800	7.390	13.810	3 STD	DI	DI	
8	200	66.65	7.230	9.700	16.125	3 STD	DI	DI	

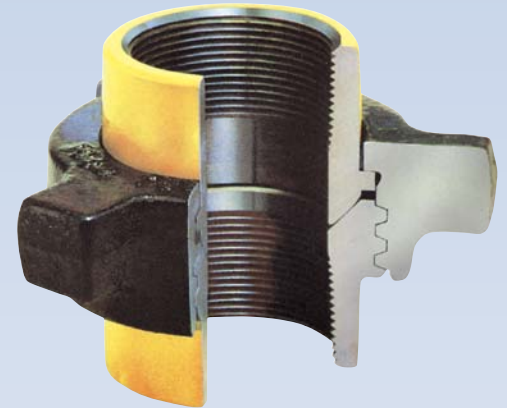

Figures 200** & 206 | 2,000 PSI CWP — 3,000 PSI TEST

Fig. 200 is a general purpose union. Thread and butt weld ends available. Fig. 206 has O-ring in male sub for improved sealing. Available in threaded and weld ends.



Size	IN	MM	Weight Lbs	Dimensions			TPI	Material	
				A	B	C+		D	Nuts
1	25	1.75	2.670	1.640	4.065	▲	6 STD	DI	SF
1¼	32	2.25	2.730	1.935	4.635	▲	6 STD	DI	SF
1½	40	2.75	2.770	2.250	4.750	▲	6 STD	DI	SF
2	50	4.90	3.275	2.825	5.900	▲	4 STD	DI	*DI
2½	65	10.00	4.250	3.400	7.900	▲	4 STD	DI	SF
3	80	13.25	4.660	4.170	8.100	▲	4 STD	DI	SF
4	100	18.35	4.910	5.075	9.060	▲	3 MOD	DI	SF
6	150	46.00	6.610	7.410	12.800	▲	3 STD	DI	SF

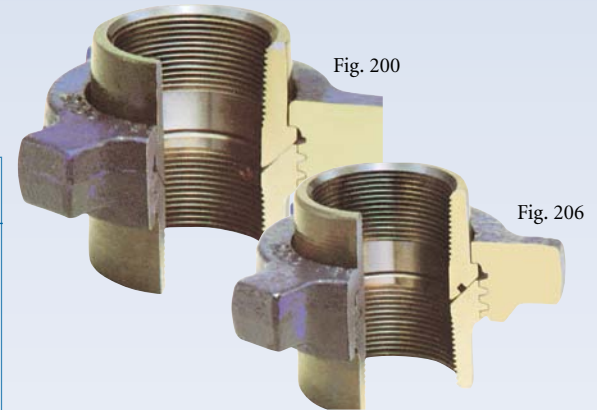


Figure 202 | 2,000 PSI CWP — 3,000 PSI TEST

(Blanking Cap Only with O-Ring)

O-Ring seated dead-end cap. Perfect for transport, completion and stimulation services. Available in 4" size.



* FIG. 100 — 2. Also available in import. Contact your Anvil sales rep.
 ** FIG. 200 — 1-2. Also available in import. Contact your Anvil sales rep.

▲ Weld ends — Consult Factory
 † Steel Forging Subs available/Consult Factory

TPI = Threads per inch
 DI = Ductile Iron
 SF = Steel Forging

WARNINGS

1. Do not mix Standard Service and Sour Gas Service Unions or parts.
2. Do not make up or break out Unions in pressurized lines.
3. Always use good safety practices, including use of safety glasses, when making up or breaking out Unions.