
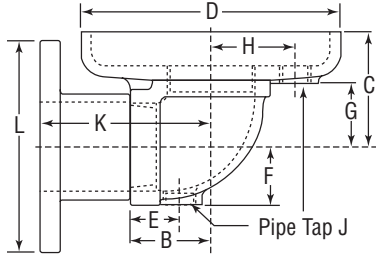


Cast Iron Threaded Fittings

Safety Valve Discharge Elbows


<p>FIGURE 1538 Screwed Cast Iron</p> 																									
		<p>Elbow Pipe Size</p>	<p>Riser Pipe Size A</p>	B		C		D		E		F		G		H		J		K		L		Unit Weight Black	
NPS	DN	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
2½	65	3½	89	2 ¹¹ / ₁₆	89	4 ⁵ / ₁₆	110	8½	216	1 ⁵ / ₈	41	1 ¹⁵ / ₁₆	49	2 ¹ / ₈	54	2¾	70	¾	19	-	-	-	-	12.00	5.44
3	80	4	102	3 ¹ / ₈	79	4 ⁷ / ₈	124	9½	241	1 ⁵ / ₈	41	2 ⁵ / ₁₆	59	2 ⁹ / ₁₆	65	3 ¹ / ₈	79	¾	19	-	-	-	-	15.00	6.80
4	100	5	127	3¾	95	5¾	146	11	279	1¾	44	2 ¹⁵ / ₁₆	75	3 ³ / ₁₆	81	3¾	95	¾	19	-	-	-	-	27.00	12.24
6	150	8	203	5 ¹ / ₈	130	7 ⁵ / ₈	194	13¾	349	2	51	4 ³ / ₁₆	106	4 ⁹ / ₁₆	116	5	127	¾	19	-	-	-	-	53.00	24.04

Following are the advantages of Anvil safety valve discharge elbow for piping connections to safety valves when attached to boilers, etc.:

- Drip pan for removing condensate and rain water casts integral with elbow.
- Strains on safety valve minimized.
- Pipe tap J is standard.

With multiple pop safety valve, leakage of vapor at any discharge elbow indicates valve in operation.

Street elbows and flanged elbows furnished on order.

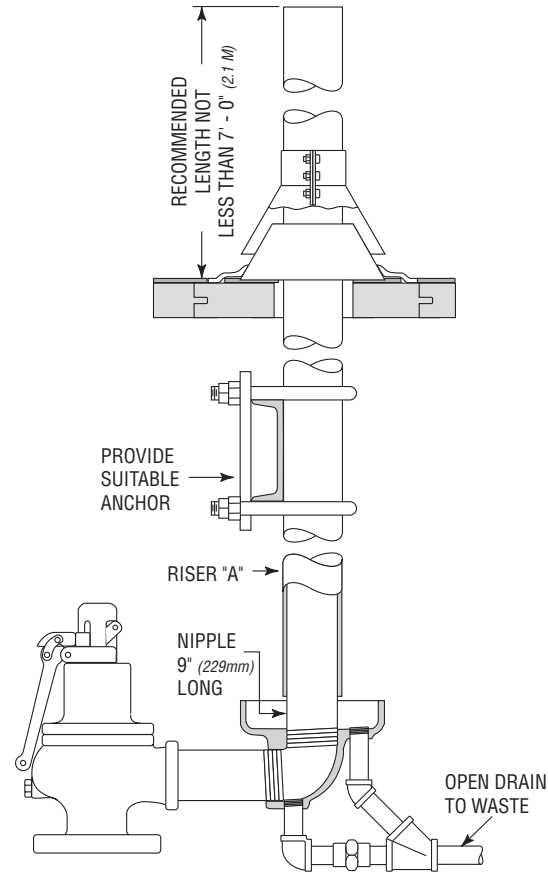

Note: See page 37 for pressure-temperature ratings.



Malleable Iron
Cast Iron
Small Steel Fittings
Pipe Nipples & Pipe Couplings
Forged Steel Fittings & Unions
Anvils
Catawissa
J.B. Smith Products
Carton Information