


# Electrofusion Fittings: Transition Saddles (Corp Saddles)

Outlet Material: Brass 360 Alloy

Compression Ring Material: Stainless 304

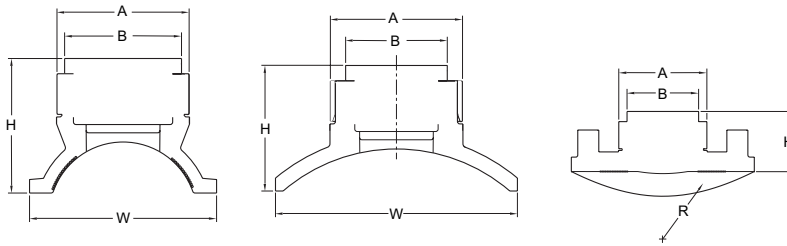


¾"–1½" outlet

### OUTLET DIMENSIONS

Outlet Size	B	Quality Standard
¾" FPT	2.50	ANSI B1.20.1
¾" CORP THD	2.50	AWWA C800
1" FPT	2.88	ANSI B1.20.1
1" CORP THD	2.50	AWWA C800
1¼" CORP THD	*	AWWA C800
1½" FPT	2.63	ANSI B1.20.1
1½" CORP THD	2.88	AWWA C800

### EF TRANSITION SADDLE DIMENSIONS

Nominal Base Size	R	A	H	W
2" IPS	1.185	3.25	3.18	3.59
3" IPS	1.750	3.25	3.18	4.60
4" IPS/DIPS	*	3.25	3.80	6.26
6" IPS/DIPS	*	3.25	4.96	8.68
8" IPS	4.312	3.25	2.96	5.92
8" DIPS	4.525	3.25	1.94	6.10
10" IPS	5.375	3.25	2.44	6.10
10" DIPS	5.550	3.25	2.21	6.10
12" IPS	6.375	3.25	2.39	6.10
12" DIPS	6.600	3.25	2.38	6.10

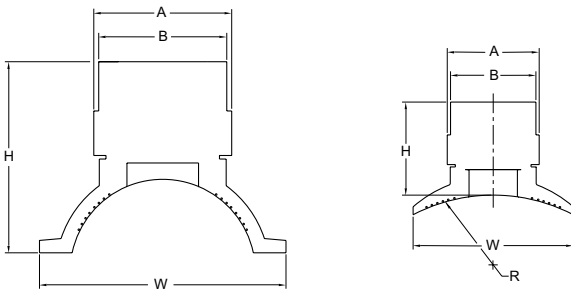

2" outlet

### EF TRANSITION SADDLE DIMENSIONS 2" OUTLET

Nominal Base Size	R	A	H	W	B
2" IPS	1.185	3.50	4.12	3.59	3.25
3" IPS	1.750	3.50	4.12	4.60	3.25
4" IPS/DIPS	*	3.50	4.74	6.26	3.25
6" IPS/DIPS	*	3.50	5.90	8.68	3.25
8" IPS	4.312	3.50	2.96	5.92	3.25
8" DIPS	4.525	3.50	3.10	6.10	3.25
10" IPS	5.375	3.50	3.34	6.10	3.25
10" DIPS	5.550	3.50	3.38	6.10	3.25
12" IPS	6.375	3.50	3.52	6.10	3.25
12" DIPS	6.600	3.50	3.54	6.10	3.25

Call for availability of other sizes and dimensions.

4.7R = 4.7 Pin with Resistor

4.7S = 4.7 Solid Pin