

Sprinkler Hub


Models 850, 851 & 853

The Shurjoint Sprinkler Hubs are grooved-end manifold fittings with a number of threaded outlets to accommodate flexible sprinkler hoses. The Sprinkler Hubs can also be used in combination with flexible sprinkler hoses and traditional hard piping depending on your requirements. These fittings work as a hub for multiple flexible hoses and or hard pipe runs, thus reducing the number or

headers, drop nipples and fittings required. All outlets are 1" NPT or BSPT. Maximum working pressure 300 psi (20 bar, 2.0 MPa) CWP. cULus listed and FM approved.




Model 850 Sprinkler Hub - 3 Outlets

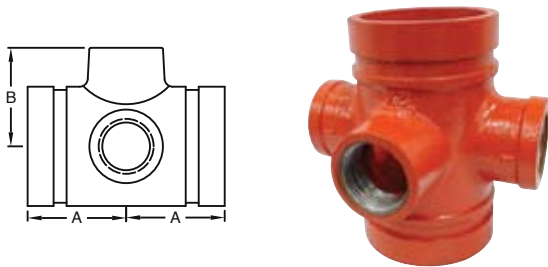

Nominal Size mm/in	A mm/in	B mm/in	N.W. Kgs/Lbs
50 x 50 x 25 (3)	60	51	1.00
2 x 2 x 1 (3)	2.38	2.02	2.20
65 x 65 x 25 (3)	60	57	1.25
2-1/2 x 2-1/2 x 1 (3)	2.38	2.25	2.75

(): Number of outlets


Model 851 Reducing Sprinkler Hub - 3 Outlets

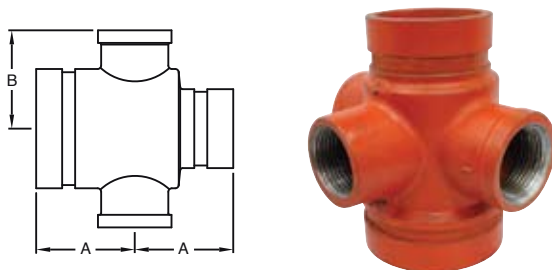

Nominal Size mm/in	A mm/in	B mm/in	N.W. Kgs/Lbs
50 x 40 x 25 (3)	60	51	1.00
2 x 1-1/2 x 1 (3)	2.38	2.02	2.20
65 x 40 x 25 (3)	60	57	1.20
2-1/2 x 1-1/2 x 1 (3)	2.38	2.25	2.65
65 x 50 x 25 (3)	60	60	1.30
2-1/2 x 2 x 1 (3)	2.38	2.25	2.86

(): Number of outlets

Model 853 Sprinkler End Hub - 4 Outlets

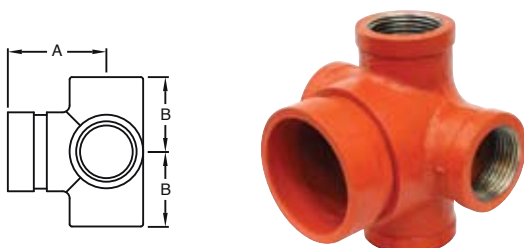

Nominal Size mm/in	A mm/in	B mm/in	N.W. Kgs/Lbs
40 x 25 (4)	60	46	0.8
1-1/2 x 1 (4)	2.38	1.80	1.76
50 x 25 (4)	60	51	1.00
2 x 1 (4)	2.38	2.02	2.20
65 x 25 (4)	60	57	1.20
2-1/2 x 1 (4)	2.38	2.25	2.64

(): Number of outlets