

## Malleable Iron Class 300 (XS / XH)

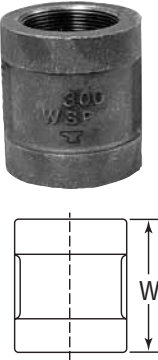

FIGURE 1166 Coupling	Size		End to End W		Unit Weight			
					Black		Galv.	
	NPS	DN	in	mm	lbs	kg	lbs	kg
	1/4	8	1 3/8	35	0.17	0.08	0.17	0.08
	3/8	10	1 5/8	41	0.26	0.12	0.26	0.12
	1/2	15	1 7/8	48	0.40	0.18	0.40	0.18
	3/4	20	2 1/8	54	0.65	0.29	0.65	0.29
	1	25	2 3/8	60	0.99	0.45	0.99	0.45
	1 1/4	32	2 7/8	73	1.66	0.75	1.66	0.75
	1 1/2	40	2 7/8	73	2.03	0.92	2.03	0.92
	2	50	3 5/8	92	3.24	1.47	3.24	1.47
	2 1/2	65	4 1/8	105	5.45	2.47	5.45	2.47
	3	80	4 1/8	105	7.30	3.31	7.30	3.31

FIGURE 1167 Reducer	Size				End to End M		Unit Weight			
							Black		Galv.	
	NPS	DN	NPS	DN	in	mm	lbs	kg	lbs	kg
	3/8	10	1/4	8	1 7/16	37	0.21	0.10	0.21	0.10
	1/2	15	1/4	8	1 11/16	43	0.31	0.14	0.31	0.14
			3/8	10			0.34	0.15	0.34	0.15
	3/4	20	1/4	8	1 3/4	44	0.46	0.21	–	–
			3/8	10			0.47	0.21	0.47	0.21
			1/2	15			0.50	0.23	0.50	0.23
	1	25	1/4	8	2	51	0.66	0.30	0.66	0.30
			3/8	10			0.71	0.32	0.71	0.32
			1/2	15			0.71	0.32	0.71	0.32
			3/4	20			0.77	0.35	0.77	0.35
	1 1/4	32	1/2	15	2 3/8	60	1.12	0.51	1.12	0.51
			3/4	20			1.16	0.53	1.16	0.53
			1	25			1.27	0.58	1.27	0.58
			1 1/2	40			1.51	0.68	1.51	0.68
	1 1/2	40	3/4	20	2 11/16	68	1.57	0.71	1.57	0.71
			1	25			1.62	0.73	1.62	0.73
			1 1/4	32			1.78	0.81	1.78	0.81
			1 1/2	15			2.39	1.08	2.39	1.08
			3/4	20			2.44	1.11	2.44	1.11
	2	50	1	25	3 3/16	81	2.54	1.15	2.54	1.15
1 1/4			32	2.66			1.21	2.66	1.21	
1 1/2			40	2.72			1.23	2.72	1.23	
2 1/2			65	4.09			1.85	4.09	1.85	
2 1/2	65	2	50	3 11/16	94	4.32	1.96	–	–	
		1 1/2	40			5.79	2.63	–	–	
3	80	2	50	4 1/16	103	5.83	2.64	5.83	2.64	
		2 1/2	65			6.45	2.93	6.45	2.93	
		2	50			9.50	4.31	–	–	
4	100	3	80	4 3/8	111	10.00	4.54	–	–	

**Note:** See page 17 for pressure-temperature ratings. Galvanized weights may vary. Please contact your Anvil Representative if you need verification. All Elbows & Tees 3/8" (10 DN) and Larger are 100% Gas Tested at a Minimum of 100 PSI. (6.9 bar)