



## APX40TN

Conservatively rated 40 watts, constant-directivity paging loudspeaker for use in public address or paging applications. Environment-resistant units feature a  $60^\circ \times 40^\circ (\pm 10^\circ)$  constant-dispersion pattern across the controlled frequency band of 1.25kHz – 10 kHz. The rotating bell pivots in precise  $15^\circ$  increments for exact on-site positioning of projection angles. **A triple lock security mounting method saves installation time and provides long-term stability.** APX40TN is equipped with an internal 25V / 70.7V / 100V transformer with screw terminal connections made beneath the rear cap. Rear cap will facilitate armored cable. Loudspeaker mounts to die-cast zinc base. Pre-mount the base to a standard 1-gang, 2-gang, or 4" square E.O. box. If replacing AP Series speakers, simply remove the APX base and mount to the Omni-Purpose<sup>®</sup> bracket. Finish is neutral. Optional Replacement Bracket, APXBK-N, is also available.

### Value Features

- Rotating Bell
- Triple Lock Security
- Quality Materials

### Easy Installation


- Universal base mounts 1-gang, 2-gang or 4" sq. E.O. boxes.
- Includes 40 watts tap @ 70.7V/100V.

### Predictability

- Clear Messaging and Music Consistent Beamwidth Control
- Fewer Speakers to Provide Quality Communications


### APX Beamwidth

Controlled Coverage Across a Wide Frequency Range

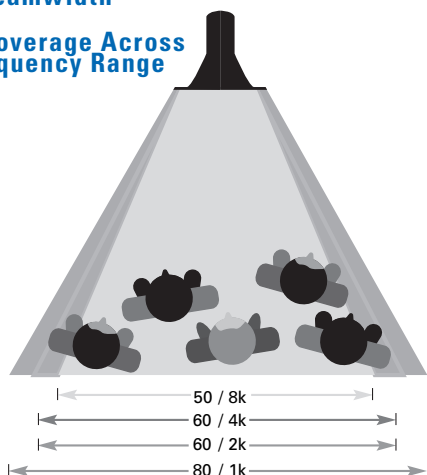

### Conventional Beamwidth

Collapsing Coverage Across a Wide Frequency Range

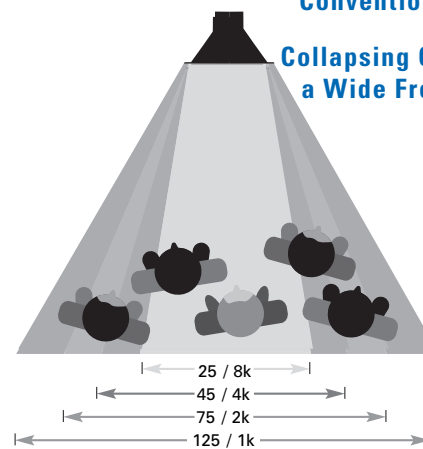

\* Typical exponential coverage illustrated