


SILLCOCK • LOOSE KEY • 150 PSI

BRASS / ZINC

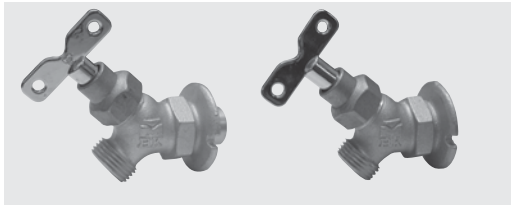

- Meets NSF approved low lead standards
- Loose key design
- Chrome plated zinc key handle with 2 holes
- Heavy construction
- For use with water or oil
- Rated for 150 PSI WOG
- Lock shield prevents the use of valve when key is removed
- Oversized notched flange for stable installation
- Pipe threads comply with ANSI B1.20.1
- Hose threads comply with ANSI B1.20.7

Part No.	UPC-A (032888)	Valve Size	Inner/Master Carton Qty.	Master Weight (lbs.)
Threaded				
108-033HC	080331	1/2"	8/NA	6
108-034HC	080348	3/4"	8/NA	5
Solder				
108-533HC*	085336	1/2" x 3/4"	8/NA	6

* 3/4" coupling required for connection to 3/4" solder connection

ANTI-SIPHON FROST FREE SILLCOCK

CHROME PLATED BRASS



- Easy quarter turn operation
- Meets NSF approved low lead standards
- CSA Certified – Canadian Standards Association
- UPC, IAPMO & ASSE approved
- Ceramic cartridge design assures long life
- Neutral putty colored handle blends in with siding or brick
- Chrome plated solid brass body and tube protects against corrosion
- Notched flange allows stable installation on siding
- Solder or threaded water supply connection
- Pipe threads comply with ANSI B1.20.1
- Hose threads comply with ANSI B1.20.7
- Solder ends comply with ANSI B16.18
- Available in Handy Carton (HC) bin box packaging
- Patent nos: D6880573 (valve assembly) D503216 (handle)

Part No.	UPC-A (032888)	Valve Size	Inner/Master Carton Qty.	Master Weight (lbs.)
1/2" Male & 1/2" Solder				
104-551HC	004016	1/2" x 4"	10/NA	12
104-553HC	003033	1/2" x 6"	8/NA	12
104-555HC	003040	1/2" x 8"	10/NA	16
104-557HC	003057	1/2" x 10"	10/NA	18
104-559HC	003064	1/2" x 12"	10/NA	19
104-561HC	004160	1/2" x 14"	5/NA	9

Mueller anti-siphon frost free sillcocks protect against back siphoning.

- A built in backflow preventer checks siphoning back into the water supply
- The sillcock drains automatically upon water shut off, if the hose is removed or open.
- For use in residential, commercial and other buildings wherever an outdoor 3/4" hose connection is needed

ANTI-SIPHON FROST FREE SILLCOCK • PEX

CHROME PLATED BRASS



- Meets NSF approved low lead standards
- ASSE approved
- CUPC certified
- Chrome plated brass body and tube
- Lead free silver solder construction
- Notched flange allows stable installation on siding
- 3/4" hose thread outlet
- Pipe threads comply with ANSI B1.20.1
- Hose threads comply with ANSI B1.20.7
- PEX ends comply with ASTM F1807
- Available in Handy Carton (HC) bin box packaging
- Patent nos: D6,880,573 (valve assembly) D503216 (handle)

Part No.	UPC-A (032888)	Valve Size	Inner/Master Carton Qty.	Master Weight (lbs.)
1/2" Male & PEX Connection				
104-711HC	047112	4"	8/NA	11
104-713HC	047136	6"	8/NA	12
104-715HC	047150	8"	10/NA	15
104-717HC	047174	10"	10/NA	16
104-719HC	047198	12"	10/NA	17
104-721HC	047211	14"	10/NA	18

