

# FLEXIBLE METAL HOSE

LITERATURE SUBMITTALS/SPECS DRAWINGS INSTALL INSTRUCTIONS O&M MANUALS WHITE PAPERS

CASE STUDIES


FLEXIBLE METAL HOSE

## Model SST

**Flexible metal hose pump connector to minimize vibration.**

Maximum Permanent Offset from 1/2".

Maximum Intermittent Offset from 1/4".

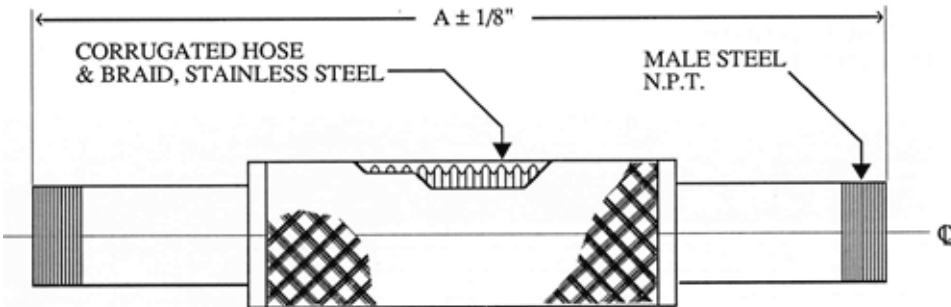

MODEL NO.	PIPE SIZE	A± 1/8"	PERMANENT OFFSET	INTERMITTENT OFFSET	PRESSURE PSI @ 70° F	Weight (lbs)	3D DRAWING
SST0075	.75"	10"	.5"	.25"	750	1	<a href="#">CAD</a>
SST0100	1"	10"	.5"	.25"	605	1	<a href="#">CAD</a>
SST0125	1.25"	10"	.5"	.25"	570	1.5	<a href="#">CAD</a>
SST0150	1.5"	12"	.5"	.25"	525	2	<a href="#">CAD</a>
SST0200	2"	14"	.5"	.25"	455	3	<a href="#">CAD</a>
SST0250	2.5"	16"	.5"	.25"	345	4	<a href="#">CAD</a>
SST0300	3"	16"	.5"	.25"	290	6	<a href="#">CAD</a>

All dimensions in inches. All units cleaned and degreased. Packed in ply bags.  
 \*Also identified as nominal size regrigeration and automotive tubing.  
 \*\*Sizes from 2-1/2" employ stainless steel braided hose to assure high pressures.

[Top](#)