




PVC & CPVC DOUBLE CONTAINMENT SYSTEMS

DC-2-1206

Double Containment Made Simple! Simplified Design, Easier Installation, Lower Overall Cost

Spears® Double Containment (DC) Fittings are constructed from standard fittings that are to be assembled on the jobsite. Spears® DC fittings work with standard pipe for both Carrier and Containment lines. Standard DC fitting configurations include Tees, Access Tees, Elbows, Couplings, Dog-Bone Couplers, Termination & Closure Fittings, and Pipe Centralizers. Plus supplemental equipment such as Clamp-on Saddles for Sensors, Expansion Joints, and In-line Valve Boxes assembled with Spears® quality Industrial Ball Valve, Ball Check or Diaphragm Valves. See Catalog publication DC-1, Double Containment, for pricing and installation information.

• Spears® Floating Carrier System Design

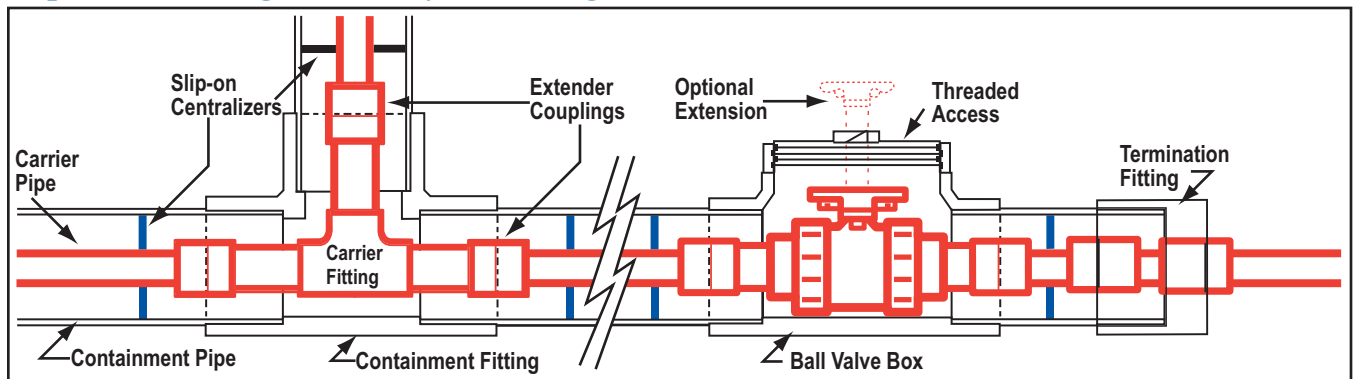

Carrier fittings are equipped with special extender couplings for connection to carrier pipe. Simple, slip-on centralizer brackets used on the carrier pipe support this assembly inside the containment pipe. This design allows the carrier fitting to “float” within the containment fitting, allowing ease of movement for installation while reducing problems associated with thermal expansion and contraction during operation.

• Full Size Range for Virtually Any Application

Carrier x Containment Sizes 1/2x2, 3/4x3, 1x3, 1-1/2x4, 2x4, 3x6, 4x8, 6x10, 8x12, plus additional sizes on request.

• PVC & CPVC Carrier/Containment Combination Configured to Order

Select any combination of carrier and containment pipe/fittings from PVC Sch 40, PVC Clear Sch 40, PVC Sch 80, CPVC Sch 80.

• Full Service Pressure Rating

Spears® Double Containment carrier pipe and fittings are suitable for full Sch 40 or Sch 80 pressure applications, except where limited by addition of valves, saddles and other system components with lower pressure ratings. Secondary containment rated at 10 psi unless otherwise specified.



*PROGRESSIVE PRODUCTS FROM
SPEARS® INNOVATION &
TECHNOLOGY*

Visit our web site: www.spearsmfg.com




Quality Systems Certificate No. 293
Corporate Facilities, Sylmar, CA
Assessed to ISO 9001: 2000

Spears® Double Containment . . . Designed for Simplicity!


• Easy, Slip-on Centralizer Brackets

Simple, slip-on design centralizes carrier pipe and fittings in containment pipe. Allows free movement of components and provides necessary space for routing of leak detection cables.




• Quick Glue-and-Connect Closure Fittings

Special fittings designed for final closure of containment pipe features glue-wiping seal to improve distribution of solvent cement during assembly. After assembly of carrier connection, simply solvent cement pipe and closure fitting and slide assembly together. Wiping seals assures spread of cement for proper bond.




• Carrier & Containment Expansion Joints

Temperature differentials can produce significant expansion and contraction changes between carrier pipe and containment pipe. These forces can severely damage system integrity. In addition to Spears® floating carrier design, Spears® in-line expansion joints can be used on either carrier or containment runs to compensate for expansion and contraction changes.




• In-Line Valve Boxes

Spears® unique containment enclosure of Valves provides easy access while allowing for addition of valve operation extensions or mechanical actuation. Special "Tee-style" configuration easily connects to containment system, minimizes space requirements and strengthens overall system integrity.



• Sensor Saddles

Easy-to-install threaded saddle tees can be easily located anywhere along containment pipe for mounting user-supplied leak detection sensors. Saddle tee forms low-point reservoir for detection of any fluid in the containment system. Select either Clamp-on style (for up to 6" pipe) or Glue-on style (for up to 8" and larger pipe).



Contact Spears® for Complete Double Containment Custom Quotation
Not For Use With Compressed Air Or Gases



SPEARS® MANUFACTURING COMPANY
CORPORATE OFFICE

15853 Olden St., Sylmar, CA 91342 • PO Box 9203, Sylmar, CA 91392
(818) 364-1611 • www.spearsmfg.com

