


Check Valves

Magnetic

Features:

- Maximum working pressure (PS): Charted below
- Working temperature range (TS): -40°F/300°F, -40°C/149°C
- Compatible with all CFC, HCFC and HFC refrigerants and oils
- UL/cUL Recognized, CE Certified
- Built-in 30 mesh stainless steel screen
- Internal components installed with DuraForm Technology
- Mechanically formed solder cup stops for easy installation
- Flexible for installation in vertical or horizontal position
- Hermetically formed solid copper body assures zero leak potential

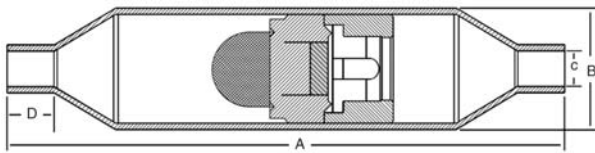

Dimensions

Part Number	Model	Size C (in)	A (in)	B (in)	D (in)	Wt (lb)	MWP (psi)
A 17934	CMV-4S	1/4	4.02	0.88	0.34	0.20	800
A 17935	CMV-6S	3/8	4.02	0.88	0.34	0.20	800
A 17936	CMV-8S	1/2	5.18	1.13	0.41	0.35	700
A 17937	CMV-10S	5/8	5.18	1.13	0.53	0.34	700
A 17938	CMV-12S	3/4	7.04	1.63	0.65	0.87	700
A 17939	CMV-14S	7/8	7.04	1.63	0.78	0.59	700
A 17940	CMV-18S	1 1/8	8.43	2.13	0.94	1.61	700
A 17941	CMV-22S	1 3/8	9.41	2.63	1.00	2.74	700
A 17942	CMV-26S	1 5/8	10.55	3.13	1.12	3.91	700
A 17943	CMV-34S	2 1/8	12.06	3.63	1.37	6.00	700
A 17944	CMV-42S	2 5/8	13.05	4.13	1.50	7.00	700
A 17981	CMV-50S	3 1/8	13.05	4.13	1.69	7.43	650

Metric Dimensions

Part Number	Model	Size C (mm)	A (mm)	B (mm)	D (mm)	Wt (kg)	MWP (bar)
A 17934	CMV-4S	6	102	22	9	0.09	55
A 17935	CMV-6S	10	102	22	9	0.09	55
A 17936	CMV-8S	13	131	29	10	0.16	48
A 17937	CMV-10S	16	131	29	13	0.16	48
A 17938	CMV-12S	19	179	41	17	0.40	48
A 17939	CMV-14S	22	179	41	20	0.27	48
A 17940	CMV-18S	29	214	54	24	0.73	48
A 17941	CMV-22S	35	239	67	25	1.24	48
A 17942	CMV-26S	41	268	79	28	1.77	48
A 17943	CMV-34S	54	306	92	35	2.72	48
A 17944	CMV-42S	67	331	105	38	3.18	48
A 17981	CMV-50S	79	331	105	43	3.37	45



RoHS Compliant. Comply with ISO 9001 Standards.

121 Rogers Street • Hartsville, TN 37074
 (800) 251-8983 or (615) 374-2124
 FAX (800) 529-0884 or (615) 374-0932

12/9/2010

www.muellerindustries.com