


8" Loudspeakers with Single Voice Coil

UHT Series


High-quality 8" ceiling or wall-mount loudspeakers for use in fire protective signaling, emergency alarm and audio evacuation systems are available with single voice coil, factory-mounted 5 watts multi-tapped transformer and two baffle styles to accommodate varying code and aesthetic requirements. UHT Series loudspeakers have a single 1" diameter voice coil, choice of 70.7V or 25V transformer, and DC blocking capacitor. **All units are shipped pre-assembled to reduce installation labor, time and expense.** Loudspeakers are equipped with a molded, fire-retardant, moisture-proof cone with whizzer and 10 oz ceramic magnet to deliver smooth frequency response with high intelligibility and minimal distortion. Transformer has a core size of 1/2" x 5/8" (13mm x 16mm) and insertion loss of 1.5 dB. All models terminate with 6" color-coded leads. UL Listed loudspeaker packages must be used with UL Listed enclosures indicated to maintain UL Listed status. Listed under UL Standard 1480—Speakers for Fire Protective Signaling Systems. As always, confirm specifications with local building codes.




161-8



96-8



198-8



51-8



95-8


8" Loudspeakers with Dual Voice Coils

UKT Series

UKT Series of 8" loudspeakers have mostly the same feature set as the UHT Series for use in fire protective signaling, emergency alarm and audio evacuation systems. The primary distinction is the UKT Series loudspeakers are equipped with two 1" diameter voice coils, two transformers (specify 70.7V or 25V), and a DC blocking capacitor.



UHT70C-U51-8

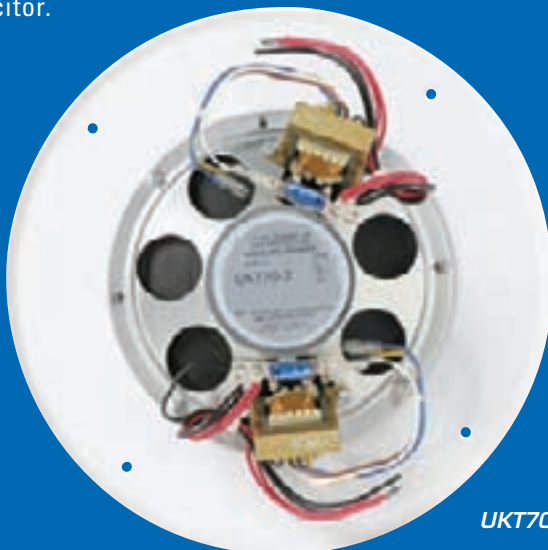

UKT70C-U51-8

