




Microphone Charging Station

AL2430 charging station includes a dock section to charge two pendant transmitters and four AA rechargeable batteries simultaneously. Unit may be wall mounted via integral key hole slots or shelf mounted for easy accessibility.



Infrared Dome Sensors

Up to three infrared dome sensors may be utilized with the AL2430 receiver/amplifier. Two are included with the system along with two 10 meter sections of UL listed RG59 coaxial cable terminated with professional "F" connectors.

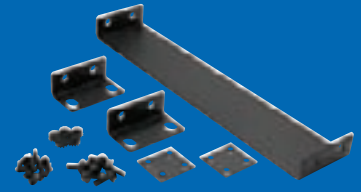

Rack Mount Kit

Optional rack ears (AL2430-RMK) may be used for rack mounting the receiver / amplifier.

Available System Configurations

AL2430-2PH-SD4

Includes: two Pendant / Handheld Transmitters, Charging Station, Receiver/Amplifier, two IR Receiver Domes with Cables, Rechargeable Batteries, Power Supplies, four Atlas Sound SD72W Loudspeakers, four 81-8 Tile Bridges, four CS95-8 Enclosures and 100' of plenum rated 18/2 speaker cable. Loudspeaker system is UL Listed for use in air handling (plenum) spaces per UL2043 standard.

AL2430-2PH

Includes: two Pendant / Handheld Transmitters, Charging Station, Receiver/Amplifier, two IR Receiver Domes with Cables, Rechargeable Batteries, and Power Supplies.

