

FLEXIBLE METAL HOSE

- LITERATURE
 - SUBMITTALS/SPECS
 - DRAWINGS
 - INSTALL INSTRUCTIONS
 - O&M MANUALS
 - WHITE PAPERS
- CASE STUDIES


FLEXIBLE METAL HOSE

Model MetraMini

Flexible metal hose pump connector to minimize vibration.

Maximum Permanent Offset from 3/8".

Maximum Intermittent Offset from 1/8".

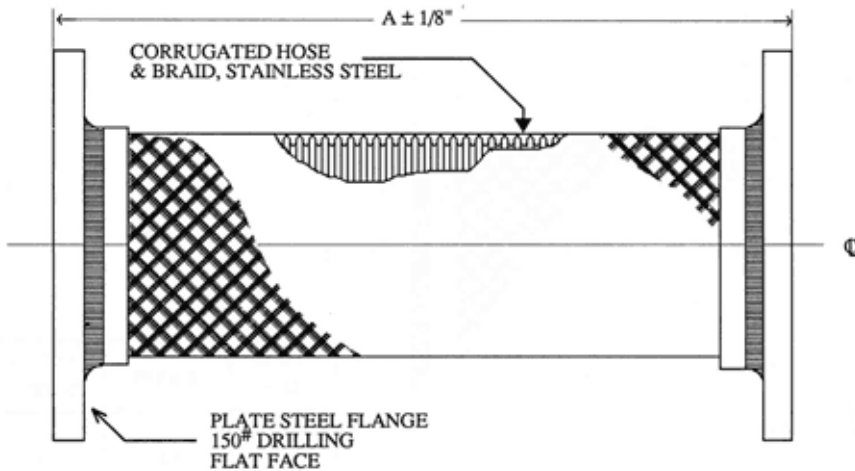

| MODEL NO. | PIPE SIZE | A ± 1/8" | PERMANENT OFFSET | INTERMITTENT OFFSET | PRESSURE PSI @ 70° F | Weight (lbs) | 3D DRAWING |
|-----------|-----------|----------|------------------|---------------------|----------------------|--------------|---------------------|
| MM0200 | 2" | 9" | .375" | .125" | 455 | 9 | CAD |
| MM0250 | 2.5" | 9" | .375" | .125" | 345 | 13 | CAD |
| MM0300 | 3" | 9" | .375" | .125" | 389 | 14 | CAD |
| MM0400 | 4" | 9" | .375" | .125" | 300 | 18 | CAD |
| MM0500 | 5" | 11" | .375" | .125" | 220 | 25 | CAD |
| MM0600 | 6" | 11" | .375" | .125" | 200 | 28 | CAD |
| MM0800 | 8" | 12" | .375" | .125" | 190 | 52 | CAD |
| MM1000 | 10" | 13" | .375" | .125" | 150 | 75 | CAD |
| MM1200 | 12" | 14" | .375" | .125" | 125 | 105 | CAD |
| MM1400 | 14" | 14" | .375" | .125" | 105 | 115 | CAD |

All dimensions in inches. All units cleaned and degreased. Packed in ply bags.
 *Also identified as nominal size refrigeration and automotive tubing.
 **Sizes from 2-1/2" employ stainless steel braided hose to assure high pressures.

[Top](#)