




NO-HUB ASA Group 022 PIPE & COUPLINGS

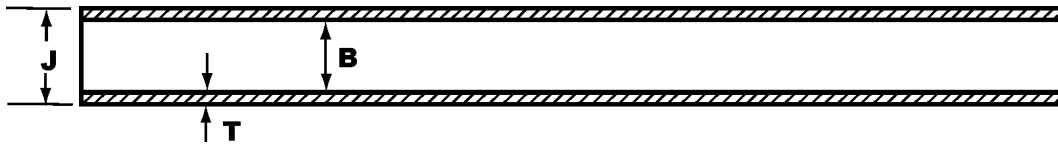

NO-HUB PIPE, TEN-FOOT LAYING LENGTH

Ship Code	UPCode 670610	Dia.	Wt. per 10* lbs.	Per Bundle	
				Pieces	Wt. lbs.
S	006763	1½	25	54	1350
S	006770	2	36	54	1955
S	006787	3	52	36	1855
S	006794	4	74	27	2013
S	006800	5	94	24	2256
S	006817	6	110	18	1998
S	006824	8	180	15	2718
S	006831	10	258	8	2084
S	376583	12	325	6	2130
S	376590	15	497	4	2060

*Note: Weights approximate, for shipping purposes only.

DIMENSIONS AND TOLERANCES

Size	Hubless Pipe Barrels		T Thickness	
	B Inside Diameter	J Outside Diameter	Norm.	Min.
1½	1.50±.09	1.90±.06	.16	.13
2	1.96±.09	2.35±.09	.16	.13
3	2.96±.09	3.35±.09	.16	.13
4	3.94±.09	4.38+.09-.05	.19	.15
5	4.94±.09	5.30+.09-.05	.19	.15
6	5.94±.09	6.30+.09-.05	.19	.15
8	7.94±.13	8.38+13-.09	.23	.17
10*	10.00±.13	10.56±.09	.28	.22
12*	11.94±.13	12.50±.13	.28	.22
15*	15.11±.13	15.83±.13	.36	.30

*O.D. Barrel out of round tolerance of ±.04 is permitted.


"Tyler Pipe Company strongly recommends that its hubless cast iron pipe and fittings be joined with shielded couplings manufactured in accordance with CISPI 310. The use of unshielded couplings or any coupling not meeting the above specifications will void the product warranty"



NO-HUB COUPLING ASSEMBLY

Ship Code	UPCode 670610	Size & Description	Carton		Pallet	
			Quantity	Wt.	Quantity	Wt.
S	006206	1½	100	20	3600	720
S	006213	2x1½	100	30	3600	1080
S	006220	2	100	20	3600	720
S	006237	3x2	100	60	2400	1440
S	006244	3	100	40	2400	960
S	006251	4x3	60	48	1440	1152
S	006268	4	100	50	1600	800
S	006275	5	20	16	480	384
S	006282	6	25	25	450	450
S	006299	8	10	18	200	360
S	006305	10	10	21	120	252
S	376569	12*	2	7	48	168
S	376576	15*	2	9	48	216

*ANACO Couplings



TORQUE WRENCH 60-inch Pounds

Ship Code	UPCode 670610	Wt.
S	006558	2.0