

## Fig. 990 - Cable Sway Brace Attachment

**Size Range** — 1/8", 3/16" and 1/4" pre-stretched cable. 3/8" thru 1 1/4" hanger rod bolt or fastener.

**Material** — Carbon Steel

**Function** — Cable attachment for sway bracing. Attaches sway brace to structure or to hanger. To be used with 7 x 19 strand core pre-stretched galvanized aircraft cable.

**Features** — Cable easily slides into oversized front arch opening. Breakaway hex nuts assure verification of proper installation. Will mount to any surface angle.



**Approvals** — Included in our Seismic Restraints Catalog approved by the State of California Office of Statewide Health Planning and Development (OSHPD). For additional load, spacing and placement information relating to OSHPD projects, please refer to the TOLCO Seismic Restraint System Guidelines.

**Finish** — Electro-Galvanized

**Order By** — Figure number, cable size and mounting hole size.

**Note** — Order 990H for hanger rod, bolt or fastener hole size 1" thru 1 1/4".

Component of State of California OSHPD Approved Seismic Restraints System

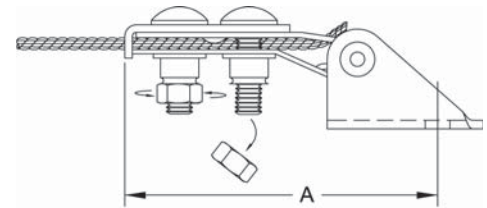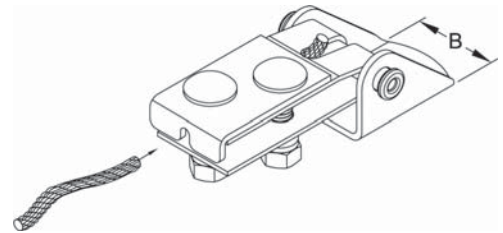

(Cable Must Be Through Entire Slot Opening)

### Dimensions • Weights

Cable Diameter	A	B	Maximum Design Load Lbs.
1/8"	4 5/16	2	975*
3/16"	5	2 1/4	2050*
1/4"	5	2 5/8	3150*

\* Maximum load rating controlled by cable breaking strength.

