

Fig. 24 - Hanger for CPVC Plastic Pipe Double Fastener Strap Type - Side Mount



Size Range - 3/4" thru 2" CPVC pipe

Material - Pre-Galvanized Steel


Function — Intended to perform as a hanger to support CPVC piping used in automatic fire sprinkler systems. Can be installed on the top or on the bottom of a beam.

Approvals — Underwriters' Laboratories Listed in the USA (UL) and Canada (cUL) to support fire sprinkler piping. May be installed in wood using fasteners supplied with product, or into minimum 20 gauge steel using (2) 1/4" x 1" tek type screws. Meets and exceeds the requirements of NFPA 13, 13R and 13D.

Features — Fig. 24 incorporates features which protect the pipe and ease installation. The flared edge design protects the CPVC pipe from any rough surface. Easily attaches to the building structure using the two UL Listed hex head self threading screws* furnished with the product. It is recommended that rechargeable electric drills fitted with a hex socket attachment be used as installation tools. No impact tools (such as a hammer) are allowed. Damage has been known to result from installations using impact type tools. No pre-drilling of a pilot hole in wood is required.

Finish - Pre-Galvanized

Order By — Figure number and pipe size

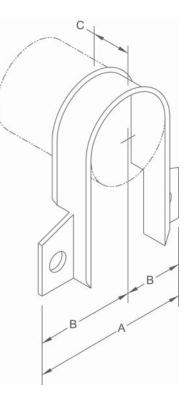

Dimensions • Weights						
CPVC Pipe Size	Α	В	С	Max. Hanger Spacing (Ft.)	Fastener Hex Head Size	Approx. Wt./100
3/4	25/16	1 5⁄32	1 3/16	51/2	5/16	9
1	25/8	1 5⁄16	1 3/ ₁₆	6	5/16	9
1 1/4	3	11/2	1 3/16	61/2	5/16	11
1 ½	31/4	1 %	1 3⁄16	7	5/16	12
2	311/16	127/32	1 3/16	8	5/16	15

^{*} Hardened hex head self threading screw is furnished with the product and is the minimum fastener size acceptable.