
Pressure Drop Chart

Y Strainers Screwed End




Flow Rate - g.p.m.

Above based on the flow of clean water through .033: - ¼" perforated metal screens. Consult our Engineering Department for pressure drop information on steam, gases or viscous fluids. See Theoretical Pressure Drop Curves for Screen Clogging In the Technical Data Section for multiplying factors for clogged screens.

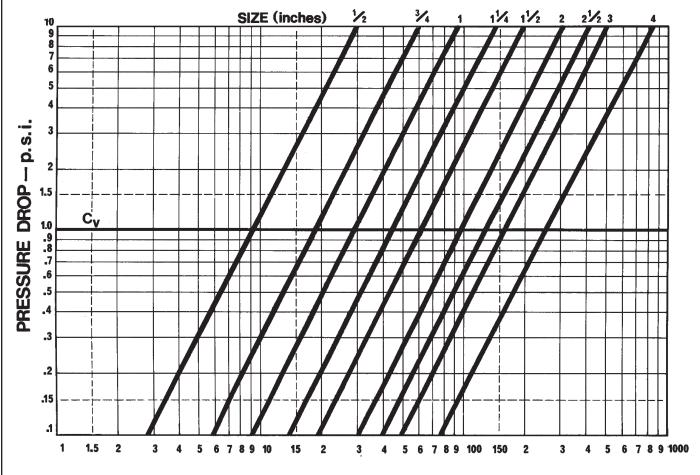

Pressure Drop Chart

Y Strainers Flanged End

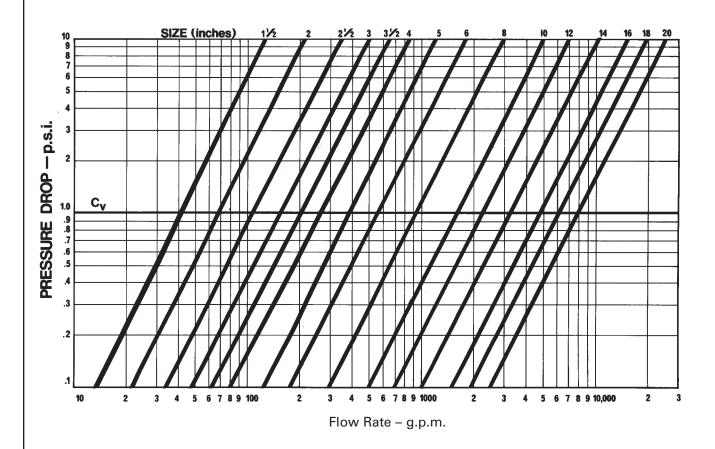

Above based on the flow of clean water through .033: - ¼" perforated metal screens. Consult our Engineering Department for pressure drop information on steam, gases or viscous fluids. See Theoretical Pressure Drop Curves for Screen Clogging In the Technical Data Section for multiplying factors for clogged screens.

Mueller Steam Specialty product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Mueller Steam Specialty Technical Service. Mueller Steam Specialty reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Mueller Steam Specialty products previously or subsequently sold.

