


Extension spindle for POM service valve Rigid

- Tight connection with the service valve through threaded end
- No additional split-pin needed
- PE outer protecting tube

Pipe cover [m]	Code	GP	kg	L [mm]	L1 [mm]
1.00	193 301 100	-	1.700	790	710
1.25	193 301 101	-	2.200	1040	960
1.50	193 301 102	-	2.700	1290	1210
2.00	193 301 105	-	3.700	1790	1710

PF 2 51 786 002

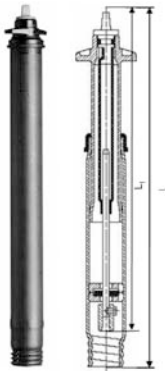

Extension spindle for POM service valve telescopic

- Tight connection with the service valve through threaded end
- No additional split-pin needed
- PE inner/outer protecting tube
- Adjustable height to suit different ground levels

Pipe cover [m]	Code	GP	kg	L [mm]	L1 [mm]
0,8-1,2	193 301 103	1	2.400	670 - 1040	590 - 960
1,3-1,8	193 301 104	-	3.500	960 - 1580	880 - 1500
1,8-2,3	193 301 106	1	4.910	1380 - 2080	1300 - 2000

PF 2 51 786 002



PE-sleeve insert

- Plug insert to adapt extension spindle for ELGEF Plus Tapping valves to POM Service Valves

Code	GP	kg
193 301 110	-	0.200

PF 2 51 786 099