

## Extension spindle

- Extension spindle made out of PVC with protection pipe (500-900 mm) and cap
- 100% plastic solution for a non-corrosive system


Length [mm]	Code	kg	
500	<b>173 103 080</b>	0.621	

PF 2 51 308 003

## Base plate with straps

Code	kg	
<b>173 103 081</b>	0.945	

PF 2 51 308 003

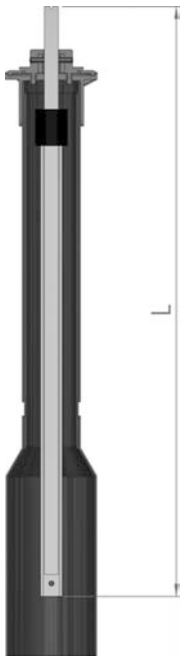

## Extension spindle for ELGEF Plus ball valve Telescopic

- For ELGEF Plus ball valve d20-d110mm
- Extension spindle acc. to DVGW GW336
- Steel square connection 20x20mm for d20-63
- Steel square connection 25x25mm for d90-d110
- Continuously adjustable and self-supporting
- Pullout- and dirt-safe
- Rod hot-dip galvanized
- PE-casing and PE-centering cap with gasket
- Inclusive clip-pin out of stainless steel
- Torque max. 140Nm

d-d [mm]	Pipe cover [m]	L [m]	Code	kg	
20 - 63	0.75-1.10	0.55 - 0.95	<b>173 103 175</b>	1.625	
20 - 63	1.10-1.70	0.90 - 1.55	<b>173 103 176</b>	2.565	
20 - 63	1.60-2.50	1.30 - 2.40	<b>173 103 177</b>	3.872	
90 - 110	0.75-1.10	0.55 - 0.85	<b>173 103 185</b>	2.500	
90 - 110	1.10-1.70	0.80 - 1.40	<b>173 103 186</b>	3.710	
90 - 110	1.60-2.50	1.30 - 2.30	<b>173 103 187</b>	6.040	

PF 2 51 308 003



## Extension spindle for ELGEF Plus ball valve Telescopic

- For ELGEF Plus ball valve d125-d225mm
- For ELGEF Plus ball valve "Full Bore" d110mm and d160mm
- Continuously adjustable and self-supporting
- Pullout- and dirt-safe
- Rod hot-dip galvanized
- PE-casing and PE-centering cap with gasket
- Polygon-bush from galvanized steel
- PE-sleeve, fitted for all dimensions
- Torque max. 140Nm

d-d [mm]	Pipe cover [m]	Code	kg	
125 - 225	0.75-1.10	<b>173 103 075</b>	2.100	
125 - 225	1.10-1.80	<b>173 103 076</b>	2.884	
125 - 225	1.65-2.75	<b>173 103 077</b>	7.200	

PF 2 51 308 003