




3" SHORT RADIUS MONITORS

Standard Features:

- Seamless carbon steel, stainless steel or brass
- Zerk fitting for lubrication
- Operates at all pressure ranges
- Low friction loss

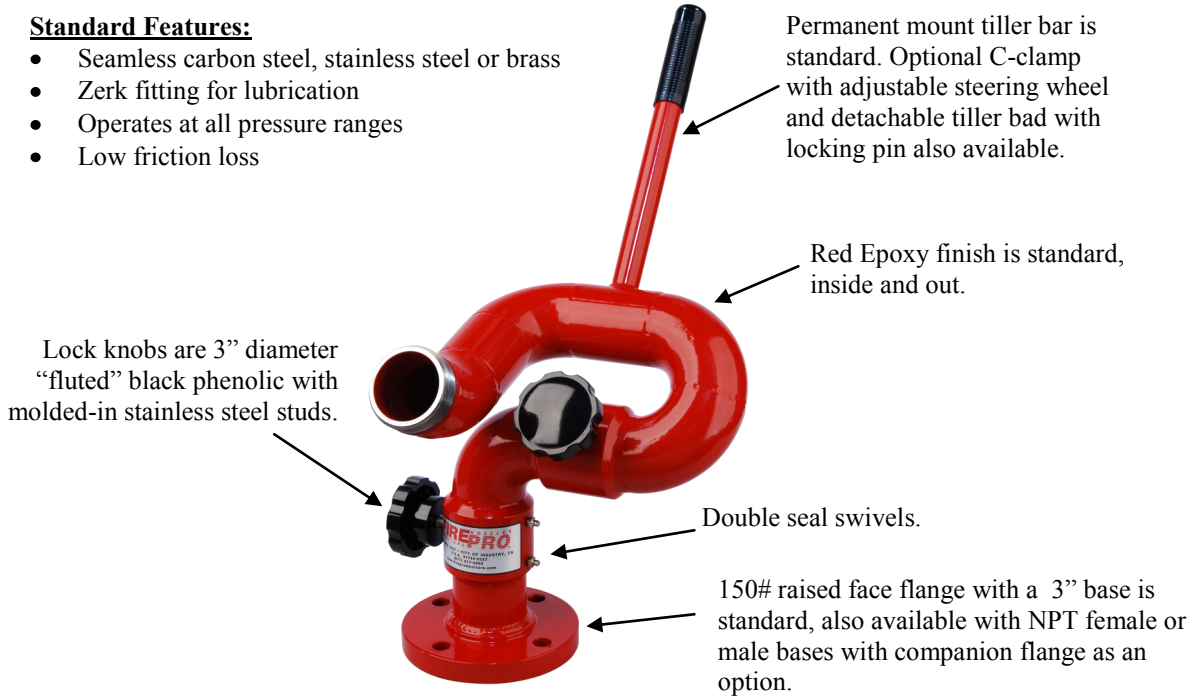

FP2SR-750 SHOWN

Potter Roemer / Fire Pro® short radius monitors were designed for applications where space is minimal. The close radius single waterway configuration is ideal for minimal height and width measurements while maintaining the balanced flow design for ease of operation. Standard finish is red epoxy inside and out.

MODEL	HEIGHT In (mm)	WIDTH In (mm)	WEIGHT Lbs (kg)	INLET In (mm)	OUTLET In (mm)	GPM In (mm)
FP3SR-1200	22 (559)	13 (330)	45 (20)	3" FLANGE (64)	2-1/2" (64)	1200 (4542)
FP4SR-1200	22 (559)	13 (330)	45 (20)	4" FLANGE (76)	2-1/2" (64)	1200 (4542)
FP3SR(F/M)-1200	22 (559)	13 (330)	45 (20)	3" NPT (F/M) (76)	2-1/2" (64)	1200 (4542)

WWW.FIREPROMONITORS.COM