




2.5" SNORKEL MONITORS

Standard Features:

- 2-1/2" steel waterway
- Type 304 stainless steel swivel
- 360° continuous horizontal travel
- 180° vertical travel
- 750 GPM

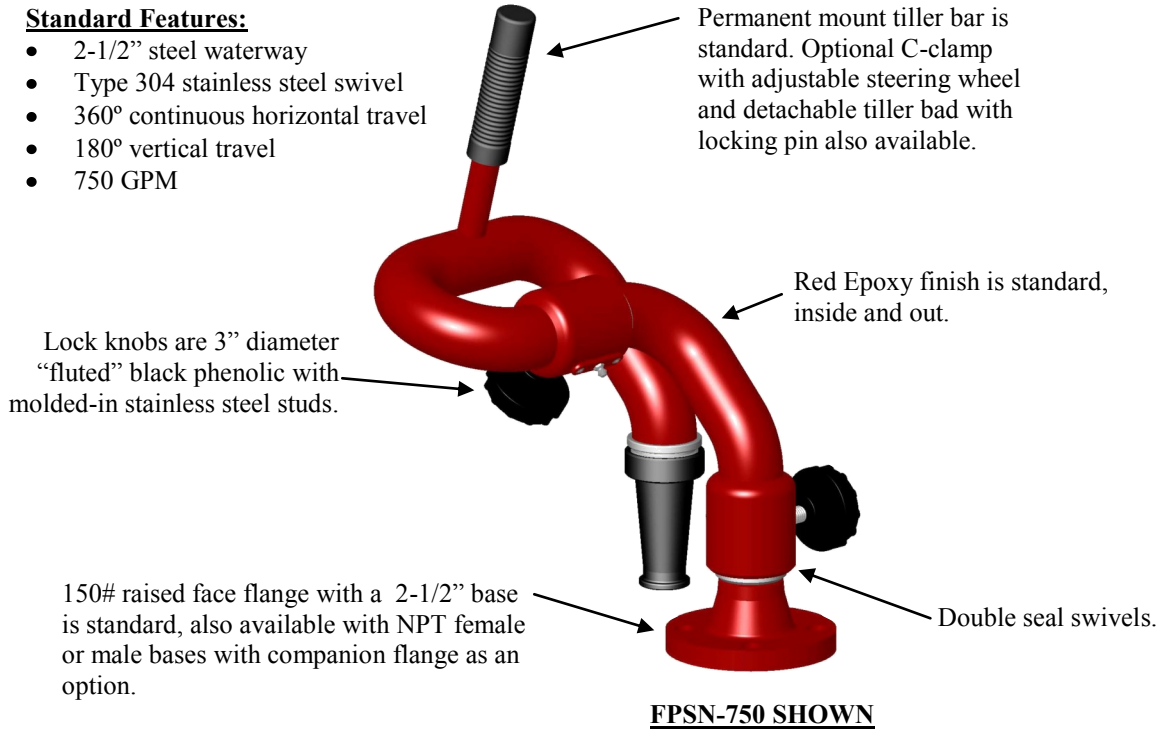

Potter Roemer / Fire Pro® offers model in this configuration feature a 180-degree vertical travel that is ideal for tank cleaning and any other wash down applications. Like all monitors from Fire Pro® heavy-duty construction and red epoxy finish stand up to the rigorous uses found in municipal and industrial environments.

MODEL	HEIGHT In (mm)	WIDTH In (mm)	WEIGHT Lbs (kg)	INLET In (mm)	OUTLET In (mm)	GPM In (mm)
FP2SN-750	22 (559)	16 (406)	52 (24)	2-1/2" (64)	2-1/2" 150# RF FLANGE (64)	750 (2839)
FP3SN-750	22 (559)	16 (406)	52 (24)	2-1/2" (64)	3" 150# RF FLANGE (76)	750 (2839)
FP4SN-750	22 (559)	16 (406)	52 (24)	2-1/2" (64)	4" 150# RF FLANGE (102)	750 (2839)
FP6SN-750	22 (559)	16 (406)	52 (24)	2-1/2" (64)	6" 150# RF FLANGE (152)	750 (2839)

WWW.FIREPROMONITORS.COM