




Variable area flow meter type 350 Float in PVDF with magnet With solvent cement sockets PVC-U metric



Model:

- Suitable limit switches see accessories for variable area flow meters
- * PVC-U transparent >DN40 available from Sept. 2009

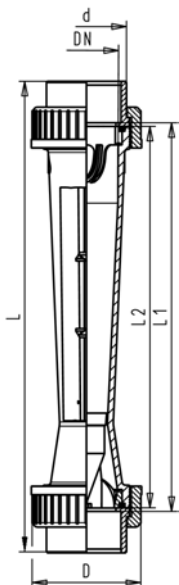

Scale range [l/h]	d [mm]	DN [mm]	Taper tube in PVC-U transp. O-Rings in EPDM Code	Taper tube in Polyamid O- rings in EPDM Code	Taper tube in Polysulfone O- rings in EPDM Code
50 - 500	32	25	198 350 100	198 350 120	198 350 140
100 - 1000	32	25	198 350 101	198 350 121	198 350 141
150 - 1500	40	32	198 350 102	198 350 122	198 350 142
250 - 2500	40	32	198 350 103	198 350 123	198 350 143
200 - 2000	50	40	198 350 104	198 350 124	198 350 144
300 - 3000	50	40	198 350 105	198 350 125	198 350 145
600 - 6000	50	40	198 350 106	198 350 126	198 350 146
600 - 6000	63	50	198350107*	198 350 127	198 350 147
1000 - 10000	63	50	198350108*	198 350 128	198 350 148
1500 - 15000	63	50	198350109*	198 350 129	198 350 149
2000 - 20000	75	65	198350110*	198 350 130	198 350 150
3000 - 30000	75	65	198350111*	198 350 131	198 350 151
8000 - 60000	75	65	198350112*	198 350 132	198 350 152

Scale range [l/h]	D [mm]	L [mm]	L1 [mm]	L2 [mm]	G [inch]
50 - 500	58	400	356	350	1 ½
100 - 1000	58	400	356	350	1 ½
150 - 1500	72	408	356	350	2
250 - 2500	72	408	356	350	2
200 - 2000	83	418	356	350	2 ¼
300 - 3000	83	418	356	350	2 ¼
600 - 6000	83	418	356	350	2 ¼
600 - 6000	101	432	356	350	2 ¾
1000 - 10000	101	432	356	350	2 ¾
1500 - 15000	101	432	356	350	2 ¾
2000 - 20000	135	444	356	350	3 ½
3000 - 30000	135	444	356	350	3 ½
8000 - 60000	135	444	356	350	3 ½