




Variable area flow meter type 335 Float in PVDF without magnet With solvent cement sockets PVC-U metric



- * PVC-U transparent >DN40 available from Sept. 2009

Scale range [l/h]	d [mm]	DN [mm]	Taper tube in PVC-U transp. O-rings in EPDM Code	Taper tube in Polyamid O- rings in EPDM Code	Taper tube in Polysulfone O- rings in EPDM Code
50 - 500	32	25	198 335 000	198 335 020	198 335 040
100 - 1000	32	25	198 335 001	198 335 021	198 335 041
150 - 1500	40	32	198 335 002	198 335 022	198 335 042
250 - 2500	40	32	198 335 003	198 335 023	198 335 043
200 - 2000	50	40	198 335 004	198 335 024	198 335 044
300 - 3000	50	40	198 335 005	198 335 025	198 335 045
600 - 6000	50	40	198 335 006	198 335 026	198 335 046
600 - 6000	63	50	198335007*	198 335 027	198 335 047
1000 - 10000	63	50	198335008*	198 335 028	198 335 048
1500 - 15000	63	50	198335009*	198 335 029	198 335 049
2000 - 20000	75	65	198335010*	198 335 030	198 335 050
3000 - 30000	75	65	198335011*	198 335 031	198 335 051
8000 - 60000	75	65	198335012*	198 335 032	198 335 052

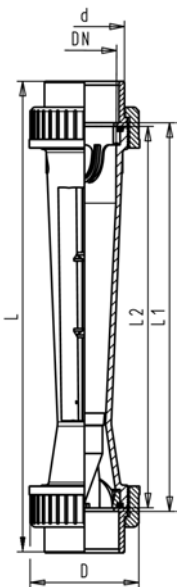

Scale range [l/h]	D [mm]	L [mm]	L1 [mm]	L2 [mm]	G [inch]
50 - 500	58	385	341	335	1 ½
100 - 1000	58	385	341	335	1 ½
150 - 1500	72	393	341	335	2
250 - 2500	72	393	341	335	2
200 - 2000	83	403	341	335	2 ¼
300 - 3000	83	403	341	335	2 ¼
600 - 6000	83	403	341	335	2 ¼
600 - 6000	101	417	341	335	2 ¾
1000 - 10000	101	417	341	335	2 ¾
1500 - 15000	101	417	341	335	2 ¾
2000 - 20000	135	429	341	335	3 ½
3000 - 30000	135	429	341	335	3 ½
8000 - 60000	135	429	341	335	3 ½