




2.5" DECK MONITORS

Standard Features:

- Seamless carbon steel, stainless steel or brass
- Zerk fitting for lubrication
- Operates at all pressure ranges
- Low friction loss

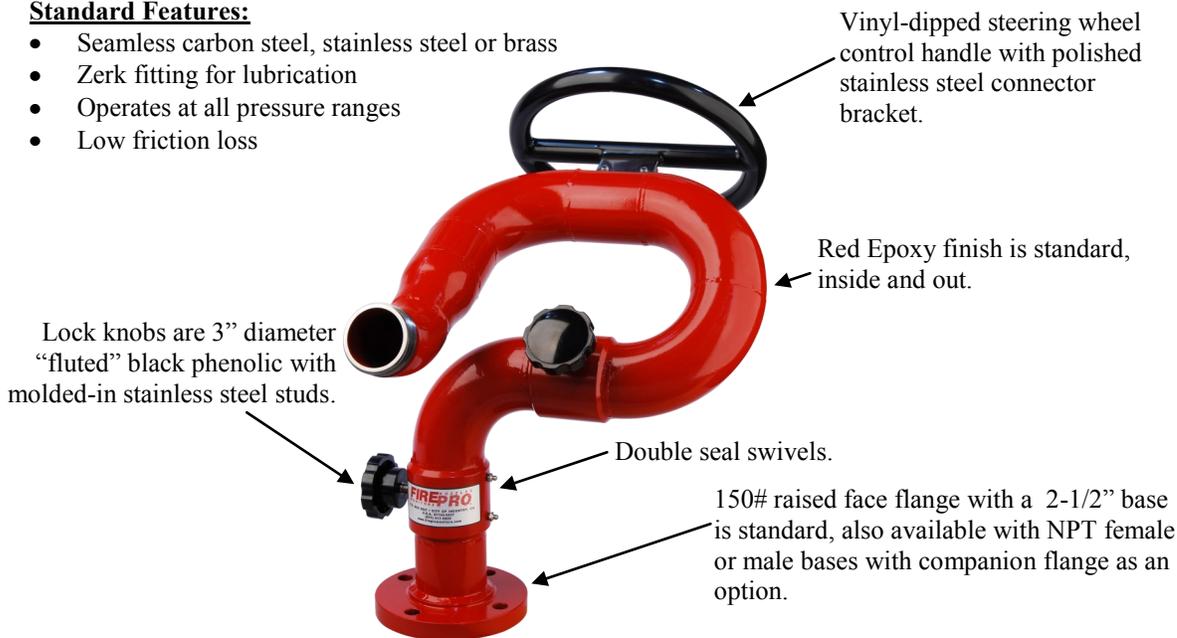

FP3SD-1200 SHOWN

Potter Roemer / Fire Pro® deck monitors have the same performance aspects as station monitors, but are equipped with a vinyl-dipped steering wheel control handle with polished stainless steel connector bracket. Available in 2.5" and 3" waterways for flows of 750 GPM and 1200 GPM respectively. These permanent mount monitors are ideally suited for municipal applications on pumpers and aerials. Standard finish is red epoxy, also available in optional chrome plate finish.

MODEL	HEIGHT In (mm)	WIDTH In (mm)	WEIGHT Lbs (kg)	INLET In (mm)	OUTLET In (mm)	GPM In (mm)
FP2SD-750	22 (559)	13 (330)	47 (21)	2-1/2" FLANGE (64)	2-1/2" (64)	750 (2839)
FP3SD-750	28 (711)	16 (406)	54 (25)	3" FLANGE (76)	2-1/2" (64)	750 (2839)
FP4SD-750	32 (813)	22 (559)	54 (25)	4" FLANGE (102)	2-1/2" (64)	750 (2839)
FP2(F/M)SD-750	22 (559)	13 (330)	47 (21)	2-1/2" NPT (F/M) (64)	2-1/2" (64)	750 (2839)
FP3(F/M)SD-750	28 (711)	16 (406)	54 (25)	3" NPT (F/M) (76)	2-1/2" (64)	750 (2839)

WWW.FIREPROMONITORS.COM

FIRE PRO NOZZLES AND MONITORS • 17541 HURLEY STREET • CITY OF INDUSTRY, CA 91744 USA •

PHONE 877-917-5800 • 626-937-4723 • FAX 626-937-4707 • EMAIL: info@firepromonitors.com

Fire Pro is a member of Acorn Engineering's Family of Companies

DECK MONITORS