

SCT Cooling Tower



Description & Features:

- Designed to protect instruments in high temperature applications
- May be used for process media temperatures up to 570°F, and can reduce the media temperature by as much as 500°F*
- 1 year warranty

Applications:

- May be utilized in various applications
- When used with a diaphragm seal, the pressure rating of the diaphragm seal must be acknowledged


Note: Pressure gauge sold separately

Specifications	
Body	316 SS
Maximum Operating Pressure	1,500 psi
Maximum Process Temperature	570°F (300°C)
Connection	1/4" NPT male x 1/4" NPT female 1/2" NPT male x 1/2" NPT female


Order Codes (products in bold are normally in stock)

1/4" NPT Male x 1/4" NPT Female	1/2" NPT Male x 1/2" NPT Female
SCT-400	SCT-500

Note: Other connections available upon request

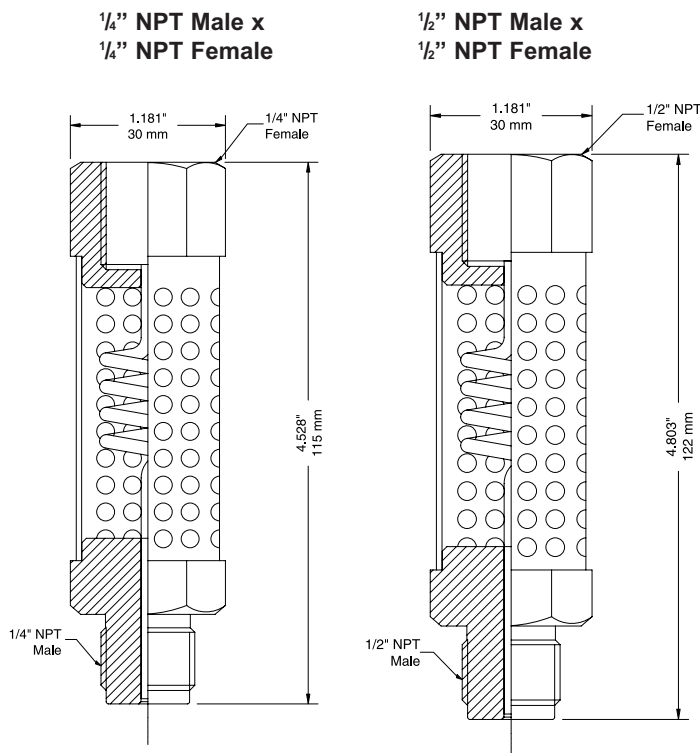

Series Number (for custom, non-standard product)



SERIES

CONNECTION SIZE

1/4"	4
3/8"	3
1/2"	2

CONNECTION THREAD

NPT	N
BSP	B
BSPT	T

*Degree of cooling is dependent on ambient conditions