## VP-61N/VP-61xI

## 6x1 Computer Graphics Video Switchers







Compatible with HDTV component video signals when used with a breakout cable such as the Kramer C-GM/3RVF.






The VP-61xl is a high-performance switcher for computer graphics video signals, with resolutions up to and exceeding UXGA, and balanced stereo audio signals. The VP-61N has all the same features of the VP-61xl but without audio.

## **FEATURES**

- High Bandwidth 400MHz (-3dB).
- HDTV Compatible.
- VP-61N Same as VP-61xl but without audio.
- Control Front panel & RS-232 (K-Router™ Windows®-based Kramer software is included).
- Standard 19" Rack Mount Size 1U.

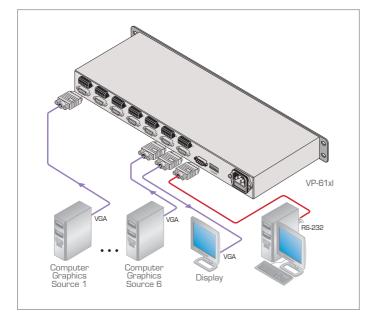

## TECHNICAL SPECIFICATIONS

6 analog red, green, blue signals: 0.7Vpp/ INPUTS:

75Ω, H & V syncs, TTL level on 15-pin HD

(F) connectors; VP-61xl:

6 balanced stereo audio signals, +4dBu

typical, 24dBu max. on detachable terminal

blocks.

OUTPUTS: 1 analog red, green, blue signal: 0.7Vpp/

 $75\Omega,\,H$  & V syncs, TTL level on a 15-pin HD (F) connector; VP-61xl:

1 balanced stereo audio signal, +4dBu

typical, 24dBu max. on a detachable

terminal block

BANDWIDTH (-3dB): 400MHz (video); 100kHz (audio). SWITCH TIME: Less than 5ms.

CONTROL: Six illuminated buttons with electronic

interlock; RS-232 via an additional 9-pin D-sub connector on rear panel.

COUPLING: DC.

POWER SOURCE: 230V AC, 50/60Hz,

(115V AC, USA) 3 VA.

DIMENSIONS: 19" x 7" x 1U W, D, H, rack mountable.

WEIGHT: 2.7kg (6lbs) approx.

ACCESSORIES: Power cord Windows®-based Kramer

control software.

