


# VS-88A


## 8x8 Balanced Stereo Audio Matrix Switcher

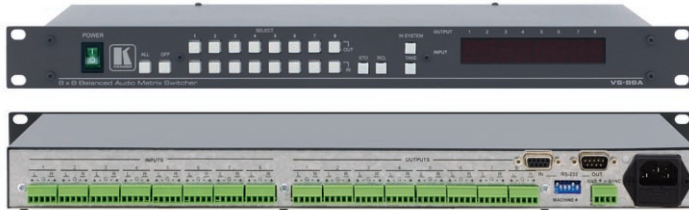

The **VS-88A** is a high-performance matrix switcher for balanced stereo audio signals. It can route any or all inputs to any or all outputs simultaneously.

### FEATURES

- S/N Ratio - 84dB unweighted (1Vpp).
- Control - Front panel, RS-232 (K-Router™ Windows®-based Kramer software is included), RS-485.
- Take Button - Executes multiple switches all at once.
- Memory Locations - Stores multiple switches as presets to be recalled and executed when needed.
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U.

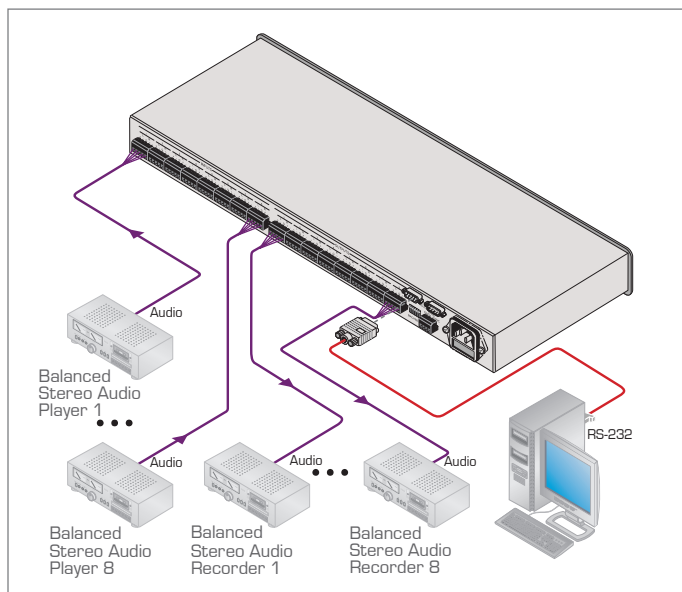

### TECHNICAL SPECIFICATIONS

INPUTS:	8 balanced stereo audio, +4dBu/33kΩ on detachable terminal blocks.
OUTPUTS:	8 balanced stereo audio, +4dBu/50Ω (20Vpp max) on detachable terminal blocks.
AUDIO BANDWIDTH (-3dB):	100kHz.
AUDIO S/N:	84dB unweighted (1Vpp).
CONTROL:	22 front panel buttons, RS-232 and RS-485 control interface.
AUDIO THD:	0.025% (1Vpp, 1kHz).
2nd HARMONIC:	0.013%.
MAX. AUDIO:	>20dBu.
DISPLAY:	Current switcher status on 8 7-segment LEDs.
POWER SOURCE:	115/230V AC, 50/60Hz, 16VA max.
DIMENSIONS:	19" x 7" x 1U W, D, H, rack mountable.
WEIGHT:	3.5kg (7.8lbs) approx.
ACCESSORIES:	Power cord.

