

VM-50YC


1:5 s-Video Distribution Amplifier



The **VM-50YC** is a high-performance distribution amplifier for s-Video (Y/C) signals. It takes one input, provides correct buffering and isolation, and distributes the signal to five identical outputs.

FEATURES

- Bandwidth (Y) - 285MHz (-3dB).
- Looping Input.
- Selectable Input Signal Termination.
- Desktop Size - Compact size. 2 units can be rack mounted side-by-side in a 1U rack space with the optional RK-1 adapter.

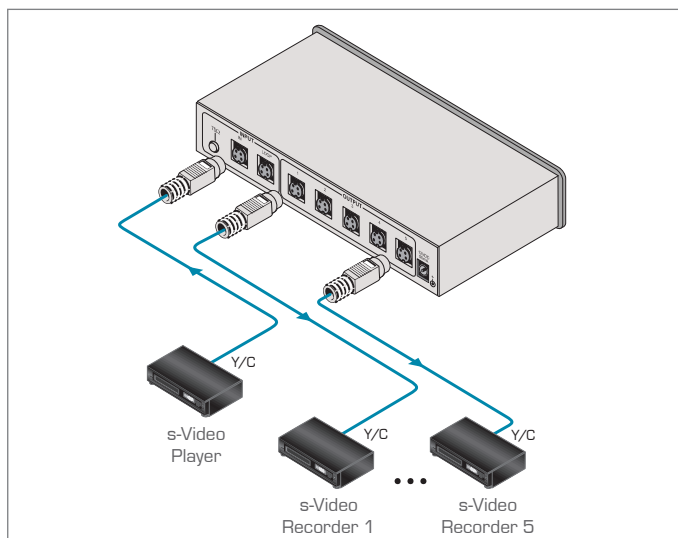

TECHNICAL SPECIFICATIONS

INPUT:	1 s-Video, looping: 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C), on 4-pin connectors with a termination switch.
OUTPUTS:	5 s-Video: 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C), on 4-pin connectors.
MAX. VIDEO OUTPUT:	2Vpp (Y).
s-VIDEO BANDWIDTH (-3dB):	285MHz (Y).
DIFF. GAIN:	0.05%.
DIFF. PHASE:	0.05Deg.
K-FACTOR:	0.05%.
S/N RATIO:	80dB.
CONTROL:	75Ω termination switch.
COUPLING:	AC.
POWER SOURCE:	12V DC, 50mA.
DIMENSIONS:	16.5cm x 12cm x 4.5cm (6.5" x 4.7" x 2.8") W, D, H.
WEIGHT:	0.58kg (1.3lbs) approx.
ACCESSORIES:	Power supply, brackets for stacking multiple units.
OPTIONS:	RK-1 19" rack adapter.

