

# PT-1 SPDIF/PT-2 SPDIF


S/PDIF & TOSLINK® Digital Audio Format Converters



The **PT-1SPDIF** and **PT-2SPDIF** are format converters for S/PDIF and TOSLINK® digital audio signals. The **PT-1SPDIF** converts an S/PDIF signal to a TOSLINK® optical signal. The **PT-2SPDIF** converts a TOSLINK® optical signal to an S/PDIF signal.

## FEATURES

- S/PDIF Input and Output - RCA connector.
- TOSLINK® Output and Input - TOSLINK® connector.
- Compact Size - Part of the Kramer TOOLS™ family of compact, high-quality and cost-effective solutions.

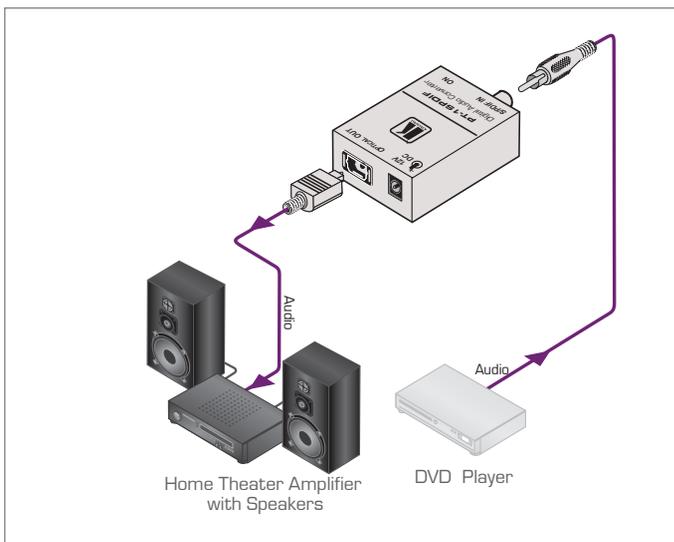

## TECHNICAL SPECIFICATIONS

INPUT:	1 S/PDIF (digital audio) on an RCA connector (PT-1SPDIF); 1 optical (digital audio) on a TOSLINK® connector (PT-2SPDIF).
OUTPUT:	1 optical (digital audio) on a TOSLINK® connector (PT-2SPDIF); 1 S/PDIF (digital audio) on an RCA connector (PT-1SPDIF).
SAMPLING:	32kHz to 192kHz.
POWER SOURCE:	12V DC, 50mA.
DIMENSIONS:	4.27cm x 5.64cm x 2.2cm (1.68" x 2.22" x 0.87") W, D, H.
ACCESSORIES:	0.3kg (0.67lbs) approx.

