

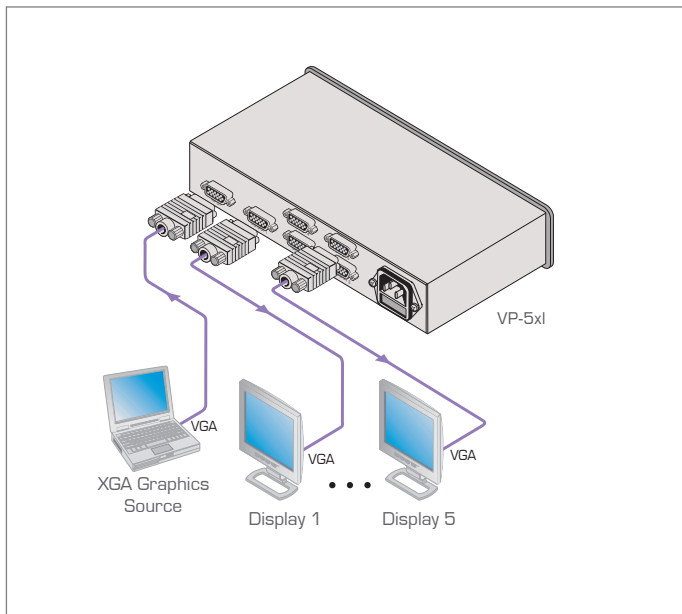


## VP-3xl/VP-4xl/VP-5xl

1:3, 1:4, 1:5 Computer Graphics Video Distribution Amplifier

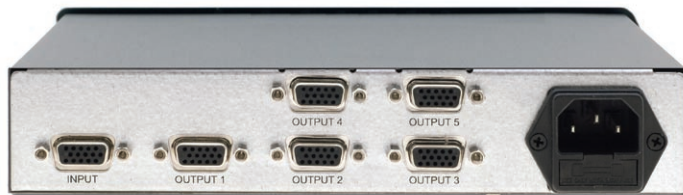

Compatible with HDTV component video signals when used with a breakout cable such as the Kramer C-GM/3RVF.

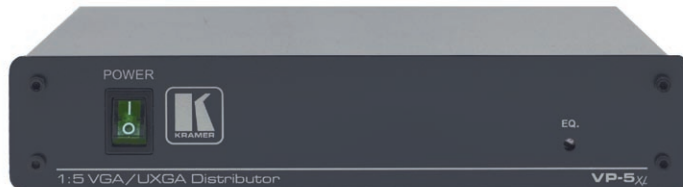

The **VP-3xl**, **VP-4xl** and **VP-5xl** are high-performance distribution amplifiers for computer graphics video signals with resolutions up to and exceeding UXGA. They take one input, provide correct buffering and isolation, and distribute the signal to three, four, or five identical outputs.

## FEATURES

- High Bandwidth - 375MHz (-3dB).
- HDTV Compatible.
- EQ (Peaking) Control.
- ID Bit Control.
- Desktop Size - Compact size. 2 units can be rack mounted side-by-side in a 1U rack space with the optional RK-1 adapter.

## TECHNICAL SPECIFICATIONS

INPUT:	1 VGA/UXGA input on a 15-pin HD (F) connector.
OUTPUTS:	3 (VP-3xl), 4 (VP-4xl), 5 (VP-5xl) VGA/UXGA on 15-pin HD (F) connectors.
MAX. OUTPUT LEVEL:	1.9Vpp.
BANDWIDTH (-3dB):	375MHz.
DIFF. GAIN:	0.12%.
DIFF. PHASE:	0.28Deg.
K-FACTOR:	<0.05%.
S/N RATIO:	73.7dB.
CONTROLS:	EQ: 0 to 6.6dB @50MHz.
COUPLING:	DC.
POWER SOURCE:	100-240V AC, 50/60Hz, 4.3VA.
DIMENSIONS:	22cm x 18cm x 4.5cm (8.7" x 7" x 1.7") W, D, H, (half 19", 1U).
WEIGHT:	1.2kg (2.64lbs).
ACCESSORIES:	Power cord.
OPTIONS:	RK-1 19" rack adapter.

