

## VM-80HP (VM-80H\*)


### 1:8 Headphone Distribution Amplifier



The **VM-80HP** (previously VM-80H) is a high-performance distribution amplifier for headphone signals. It takes one stereo headphone input and distributes the signal to eight identical stereo headphone outputs.

#### FEATURES

- Mono/Stereo Input Selection.
- Level (Gain) Controls - Each output.
- Desktop Size - Compact size. 2 units can be rack mounted side-by-side in a 1U rack space with the optional RK-1 adapter.

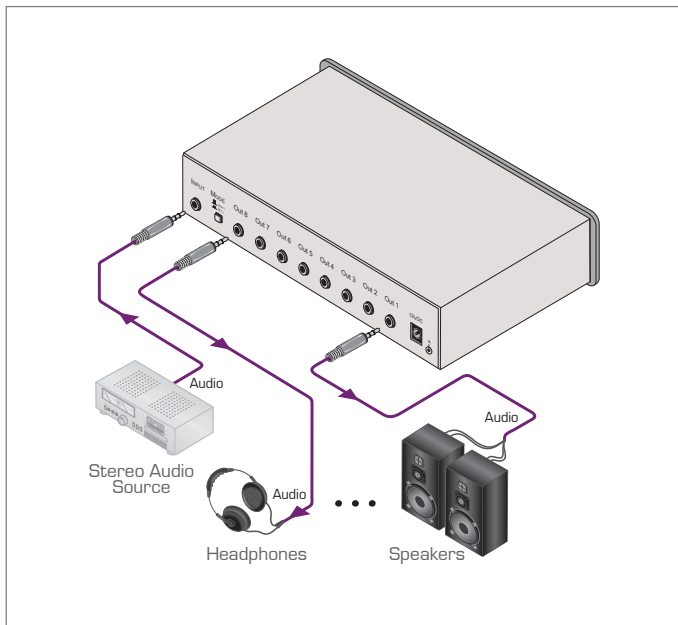

\*Previous product name

#### TECHNICAL SPECIFICATIONS

INPUT:	1 balanced/unbalanced stereo audio, 1Vpp/10kΩ on a 6.5mm phone jack.
OUTPUTS:	Stereo mode: 8 unbalanced stereo audio, 500mW/8Ω on 6.5mm phone jacks; mono mode: 16 unbalanced mono audio, 500mW/8Ω on 6.5mm phone jacks.
MAX. OUTPUT LEVEL:	7.2Vpp, 8Ω.
BANDWIDTH (-3dB):	>100kHz.
S/N RATIO:	78.8dB.
CONTROLS:	Level control: -44dB to +17dB.
COUPLING:	AC.
AUDIO THD + NOISE:	0.023%.
AUDIO 2nd HARMONIC:	0.003%.
POWER SOURCE:	12V DC, 1.9A.
DIMENSIONS:	21.46cm x 16.25cm x 4.04cm (8.45" x 6.39" x 1.59") W, D, H.
WEIGHT:	1.3kg (2.9lbs) approx.
ACCESSORIES:	Power supply, mounting bracket.
OPTIONS:	RK-1 19" rack adapter.

