

VS-42H/VS-44H/VS-66H (VS-42HDMI/VS-44HDMI/VS-66HDMI*)


4x2, 4x4 & 6x6 HDMI Matrix Switchers



The **VS-42H**, **VS-44H**, and **VS-66H** are high-performance matrix switchers for HDMI signals. They reclock and equalize the signal and can route any input to any or all outputs simultaneously.

FEATURES

- Maximum Data Rate - 1.65Gbps.
- Kramer Equalization & re-Klocking™ Technology - Rebuilds the digital signal to travel longer distances.
- HDCP & HDMI Compliant.
- HDTV Compatible.
- Fast Switching Technology - Reduces switching delay between HDMI sources.
- I-EDIDPro™ Kramer Intelligent EDID Processing™ - Intelligent EDID handling & processing algorithm ensures Plug and Play operation for HDMI systems.
- Flexible Control Options - Front panel, IR Remote, RS-232 (K-Router™ Windows®-based software is included) & Ethernet (Windows®-based Ethernet Configuration Manager & Virtual Serial Port Manager is included).
- Includes two OFF buttons to disconnect each output.
- Front Panel Lockout.
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.

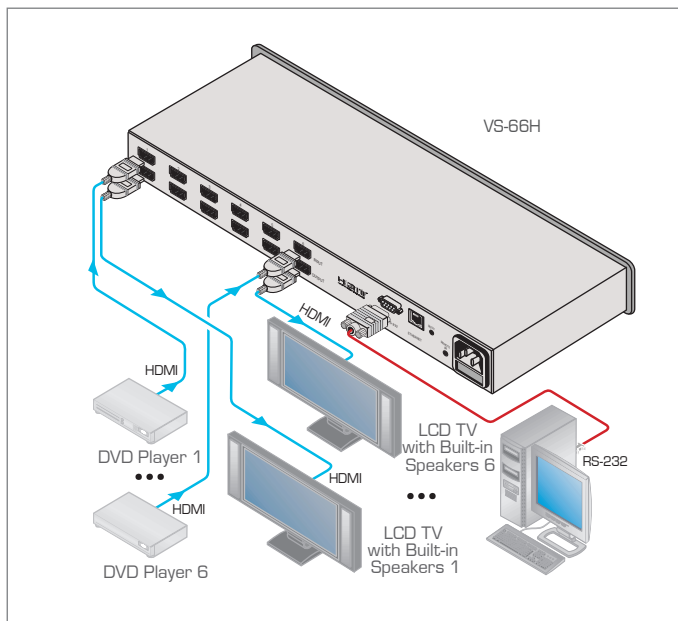

*Previous product name

TECHNICAL SPECIFICATIONS

INPUTS:	4/4/6 HDMI connectors.
OUTPUTS:	2/4/6 HDMI connectors.
BANDWIDTH:	Supports up to 1.65Gbps per graphic channel.
COMPLIANCE WITH HDMI STANDARD:	Supports HDMI and HDCP.
RESOLUTION:	Up to UXGA; 1080p.
POWER SOURCE:	90-240V AC; 50/60Hz, 10VA.
CONTROLS:	Front panel buttons, infrared remote control transmitter, RS-232, Ethernet.
DIMENSIONS:	19" x 7" x 1U W, D, H, rack mountable.
WEIGHT:	2.5kg (5.5lbs) approx.
ACCESSORIES:	Power cord, IR transmitter, rack "ears".
OPTIONS:	Kramer HDMI cables. For best results, use Kramer cables such as the C-HDMI/HDMI series, the C-HDMI-DVI series and/or our HDMI over fiber optics C-FOHM/FOHM series.

