

VM-24H (VM-24HDMI*)/VM-4HxI (VM-4HDMIxI*)

1:4 HDMI Distribution Amplifiers


NEW



The **VM-24H** and **VM-4HxI** are distribution amplifiers for HDMI signals. The units relock and equalize one input signal (of two selectable input signals on the **VM-24H**) and distribute it to four identical outputs.

FEATURES

- Max. Data Rate - 2.25Gbps.
- HDCP Compliant.
- HDMI Support - HDMI (V.1.4 with Deep Color, x.v.Color™, Lip Sync, HDMI Uncompressed Audio Channels, Dolby TrueHD, DTS-HD, CEC).
- 3D Pass-Through.
- I-EDIDPro™ Kramer Intelligent EDID Processing™ - Intelligent EDID handling & processing algorithm ensures Plug and Play operation for HDMI systems.
- Active Output LED Indicators.
- Control - Front panel, RS-232 or IR switching (VM-24H).
- Kramer Equalization & re-Klocking™ Technology - Rebuilds the digital signal integrity to travel longer distances.
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.

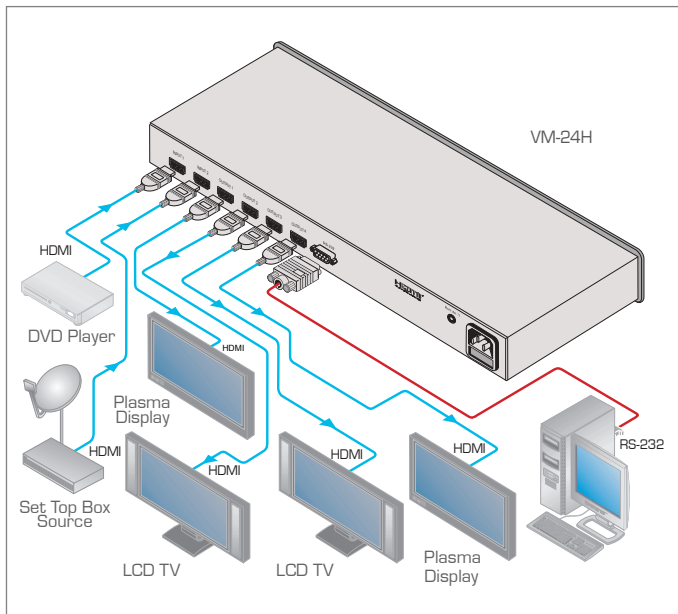

*Previous product name

TECHNICAL SPECIFICATIONS

INPUTS:	1 HDMI connector(VM-4HxI); 2 HDMI connectors (VM-24H).
OUTPUTS:	4 HDMI connectors.
BANDWIDTH:	Supports up to 2.25Gbps bandwidth per graphic channel.
COMPLIANCE WITH HDMI STANDARD:	Supports HDMI and HDCP.
CONTROLS:	EDID SELECT, EDID READ; IN 1, IN 2 buttons, RS-232 (IR VM-24H).
INDICATOR LEDs:	OUTPUTS 1 to 4, and ACTIVE LED.
POWER SOURCE:	100-240V AC, 50/60Hz, 16VA.
DIMENSIONS:	19" x 7" x 1U W, D, H, rack mountable.
DIMENSIONS:	2.5kg (5.5lbs) approx.
ACCESSORIES:	Power cord, rack "ears".
OPTIONS:	HDMI/HDMI male-to-male cables; Fiber optic HDMI Cable (C-FOHM/FOHM), external remote IR receiver cable (VM-24H).

DISTRIBUTION AMPLIFIERS

