


TR-2A

Balanced Stereo Audio Isolation Transformer

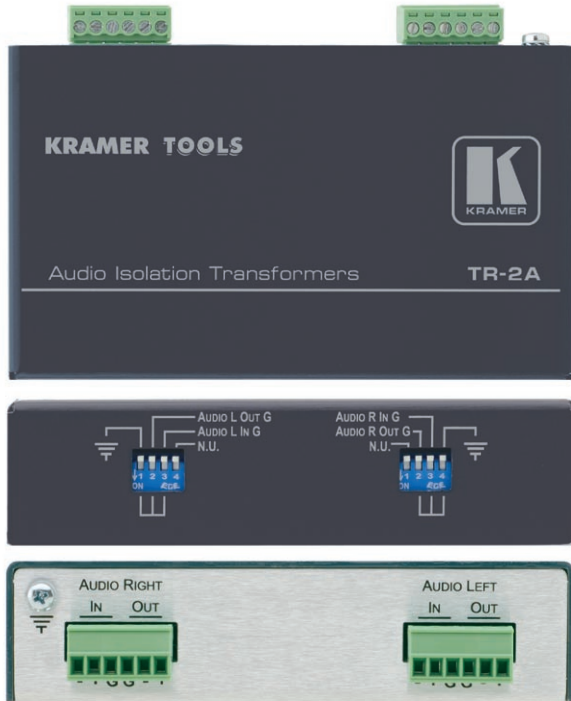


The **TR-2A** is a high-performance audio isolation transformer for balanced stereo signals. It provides complete isolation between devices to eliminate hum, ground loops and DC offsets, which can degrade the audio quality.

FEATURES

- S/N Ratio - -83dB @+4dBu, 1kHz.
- External Input & Output Ground Terminals.
- Grounding Options - DIP-switch selectable.
- Passive - No power required.
- Compact Kramer TOOLS™ - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3TR rack adapter.

SPECIALTY AV PRODUCTS

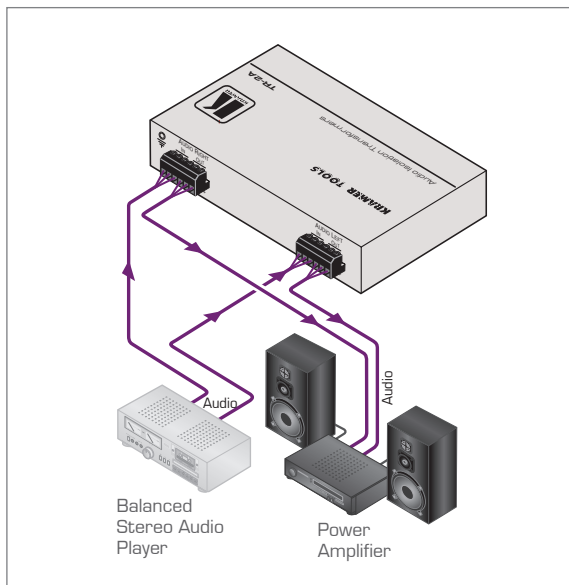

TECHNICAL SPECIFICATIONS

INPUT:	1 balanced stereo audio +4dBu/600Ω on detachable terminal blocks.
OUTPUTS:	1 balanced stereo audio +4dBu/600Ω on detachable terminal blocks.
MAX. OUTPUT LEVEL:	+26dBu.
BANDWIDTH (-3dB):	20Hz to 20kHz.
S/N RATIO:	-83dBu @+4dBu/1000Hz.
CONTROLS:	DIP-switches to connect to chassis.
COUPLING:	Transformer.
AUDIO THD + NOISE:	0.025% @+4dBu/1000Hz.
DIMENSIONS:	12.1cm x 7.2cm x 3cm (4.77" x 2.85" x 1.2") W, D, H.
WEIGHT:	0.34kg (0.75lbs) approx.
ACCESSORIES:	Mounting brackets.
OPTIONS:	RK-3TR 19" rack adapter.

