


VS-121HCA


12x1 Stereo Audio - S/PDIF Switcher

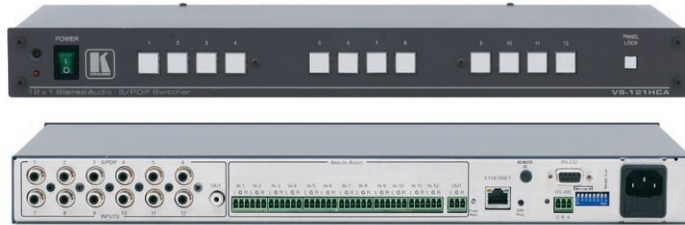

The **VS-121HCA** is a high-performance switcher for stereo audio and S/PDIF audio signals. The unit consists of two independent 12x1 switchers that switch simultaneously without any analog to digital or digital transcoding.

FEATURES

- Stand Alone or VS-121HC Companion Switcher.
- **Inputs** - 12 S/PDIF (RCA connectors) and 12 stereo audio (terminal blocks).
- **Outputs** - 1 S/PDIF (RCA connector) and 1 stereo audio (terminal blocks).
- **Front Panel Control Lockout.**
- **Flexible Control Options** - Front panel, RS-232 (K-Single™ Windows®-based software is included), Ethernet & IR remote (included).
- **Worldwide Power Supply** - 100-240V AC.
- **Standard 19" Rack Mount Size** - 1U. Rack "ears" included.

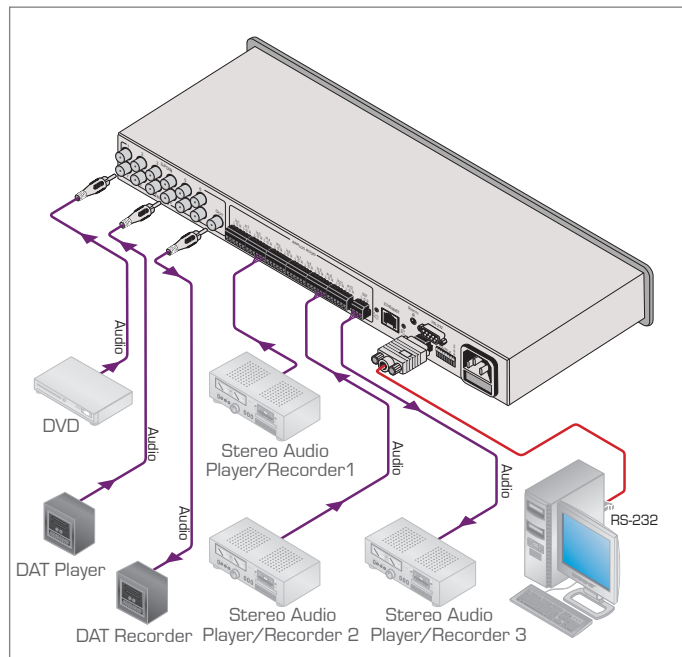

TECHNICAL SPECIFICATIONS

INPUTS:	12 unbalanced stereo audio on a detachable terminal block connectors; 12 S/PDIF on RCA connectors.
OUTPUTS:	1 unbalanced stereo audio on a detachable terminal block connector; 1 S/PDIF on RCA connector.
MAX OUTPUT LEVEL:	6Vpp.
BANDWIDTH (-3dB):	46kHz.
S/N RATIO:	80dB @1kHz.
CROSSTALK (all hostile):	-75dB @1kHz.
CONTROLS:	12 input selector buttons, RS-232, RS-485, Ethernet, IR.
COUPLING:	Input: AC, output: DC.
AUDIO THD + NOISE:	0.062% @1kHz.
AUDIO 2nd HARMONIC:	0.02% @1kHz.
POWER SOURCE:	100-240V AC, 50/60Hz, (115V AC, USA) 8VA.
DIMENSIONS:	19" x 7" x 1U W, D, H, rack mountable.
WEIGHT:	2.6kg (5.7lbs) approx.
ACCESSORIES:	Power cord, null-modem adapter, rack "ears", RC-IR2 remote control transmitter, Windows®-based Kramer control software.
OPTIONS:	External remote IR receiver cable.

