

C-BM/BM

BNC Coax Video Cable



Kramer's **BM** series cables are constructed of high performance RG-6 cable with 75Ω BNC connectors at each end. They offer outstanding quality, durability, and high performance for any video signal application.

FEATURES

- **Quality Construction** - RG-6 cable for the highest resolution signals.
- **High-Quality Connectors** - True 75Ω BNC connectors maintain correct impedance end-to-end.
- **Cable Specs** - See Kramer BC-1X bulk cable for detailed specs.
- **Varied Selection of Lengths** - Available in 1.5, 3, 6, 10, 15, 25, 35, 50, 75, 100 and 150ft versions (0.45 to 45m).

C-MBM/MBM

Mini Coax BNC Video Cable




Kramer's **MBM** series are "micro" sized video cables with male BNC connectors at both ends. They are ideal for short to medium length composite video applications when an extremely small profile and maximum flexibility is desired.

FEATURES

- **Quality Construction** - Built from compact, durable and flexible 28 gauge mini coax cable with molded 75Ω BNC connectors.
- **Compatibility** - Use this cable to patch together sources and destinations which use BNC connectors for video signals.
- **Varied Selection of Lengths** - Available in 1, 2, 3, 6, 10, 15 and 25ft versions (0.3 to 7.6m).

C-5BM/5BM

5 BNC RGBHV Mini Coax Cable

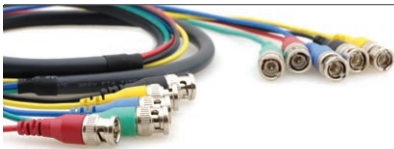

Kramer's **5BM** series cables are constructed of 5 mini coax cables in a single jacket with 75Ω BNC connectors at each end. They offer outstanding quality, durability, and high performance for any RGBHV video signal application.

FEATURES

- **Quality Construction** - Constructed from flexible, high quality 5 mini coax cable.
- **Applications** - Ideal for routing typical computer graphics video RGBHV signals to display devices such as projectors and monitors.
- **Easy Installation** - Breakout length is 18in on any cables 6ft or longer. Shorter cables have approx 7in breakout length.
- **Cable Specs** - For detailed cable specs see Kramer BC-5X.
- **Varied Selection of Lengths** - Available in 3, 6, 10, 15, 25, 35, 50, 75 and 100ft versions (0.9 to 30.5m).