


VM-22H (VM-22HDMI*)/VM-2HxI (VM-2HDMIxI*)


1:2 HDMI Distribution Amplifiers

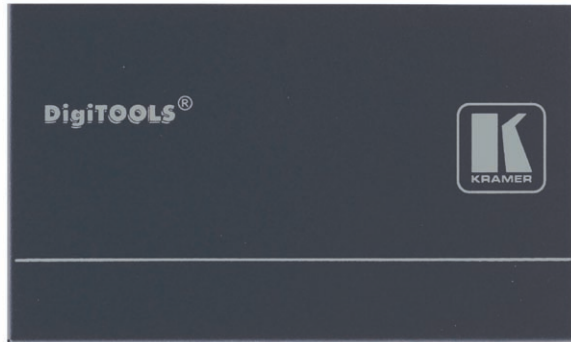

The **VM-22H** and **VM-2HxI** are distribution amplifiers for HDMI signals. The units reclock and equalize one input signal (1 of 2 selectable on the **VM-22H**) and distribute it to 2 identical outputs.

FEATURES

- Max. Data Rate - 2.25Gbps.
- HDCP Compliant.
- HDMI Support - HDMI (V.1.4 with Deep Color, x.v.Color™, Lip Sync, CEC).
- 3D Pass-Through.
- I-EDIDPro™ Kramer Intelligent EDID Processing™ - Intelligent EDID handling & processing algorithm ensures Plug and Play operation for HDMI systems.
- Active Output LED Indicators.
- Control - Front panel or IR switching (VM-22H).
- Kramer Equalization & re-Klocking™ Technology - Rebuilds the digital signal integrity to travel longer distances.
- Compact DigiTOOLS® - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

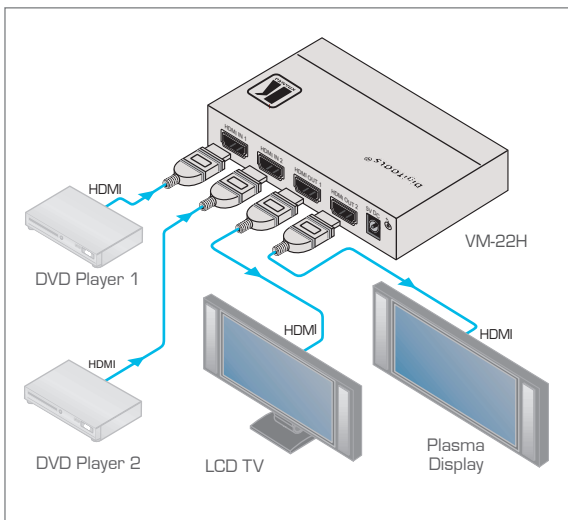

*Previous product name

TECHNICAL SPECIFICATIONS

INPUTS:	1 HDMI connector (VM-2HxI); 2 HDMI connectors (VM-22H).
OUTPUTS:	2 HDMI connectors.
BANDWIDTH:	Supports up to 2.25Gbps bandwidth per graphic channel.
COMPLIANCE WITH HDMI STANDARD:	Supports HDMI and HDCP.
CONTROLS:	EDID SETUP button, input select button.
INDICATOR LEDs:	IN 1, IN 2, OUT 1, OUT 2, and ON LEDs.
POWER SOURCE:	5V DC, 910mA.
DIMENSIONS:	12cm x 7.2cm x 2.4cm (4.7" x 2.8" 1.0") W, D, H.
WEIGHT:	0.3kg (0.67lbs) approx.
ACCESSORIES:	Power supply, mounting bracket.
OPTIONS:	HDMI/HDMI male-to-male cables, RK-3T 19" rack adapter.

