










The FC-322 is a high-performance format converter for 3G HD-SDI signals. It converts one of two 3G HD-SDI signals to two HDMI output signals with the same resolution and frame rate.

FEATURES

- Inputs 2 3G HD-SDI on BNC connectors.
- Outputs 2 HDMI.
- HDTV Compatible.
- Audio Group De-embedded Selection.
- Multi-Standard Operation SDI (SMPTE 259M and SMPTE 344M), HD-SDI (SMPTE 292M) and 3G HD-SDI (SMPTE 424M).
- Active Input & Output LED Indicators.
- Switching Front panel and IR remote (included).
- Compact DigiTOOLS® 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

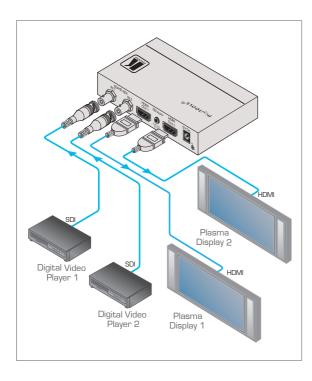

TECHNICAL SPECIFICATIONS

INPUTS: 2 SDI, HD-SDI, 3G HD-SDI on BNC connectors.

OUTPUTS: 2 HDMI connectors. MAX. DATA RATE: Up to 3Gbps. STANDARD COMPLIANCE: HDMI. INDICATOR LEDS: SD/HD, OUT, ON. POWER SOURCE: 5V DC, 580mA.

DIMENSIONS: 12cm x 7.2cm x 2.4cm (4.7" x 2.8" x 1.0") W, D, H.

WEIGHT: 0.3kg (0.7lbs). ACCESSORIES:

Power supply. RK-3T 19" rack mount adapter. OPTIONS:

