VM-3AN

1:3 Balanced Stereo Audio Distribution Amplifier






The VM-3AN is a high-performance distribution amplifier for balanced stereo audio signals. The unit takes one stereo input and distributes the signal to three identical outputs.

FEATURES

- S/N Ratio 90dB.
- L & R Level (Gain) Controls.
- Compact Kramer TOOLS™ 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.





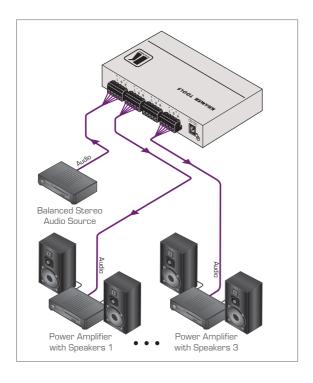

TECHNICAL SPECIFICATIONS

INPUT: 1 balanced audio stereo on 5-pin terminal block. OUTPUTS: 3 balanced audio stereo on 5-pin terminal blocks. Audio: 18.5Vpp. MAX. OUTPUT LEVEL:

BANDWIDTH (-3dB): >100 kHz. S/N RATIO: 90dB @1kHz.

CONTROL: Output level control:-77 to +6dB, R+/-, L+/- channels. AUDIO THD + NOISE: 0.008%.

0.001%. AUDIO 2d HARMONIC: POWER SOURCE: 12V DC, 89mA.

DIMENSIONS: 11.7cm x 6cm x 3.2cm (4.6" x 2.4" x 1.3") W, D, H.

0.28kg (0.62lbs) approx. WEIGHT: ACCESSORIES: Power supply.

RK-3T 19" rack adapter. OPTIONS:

