


# PL-8

## Low-Voltage Relay Controller

NEW

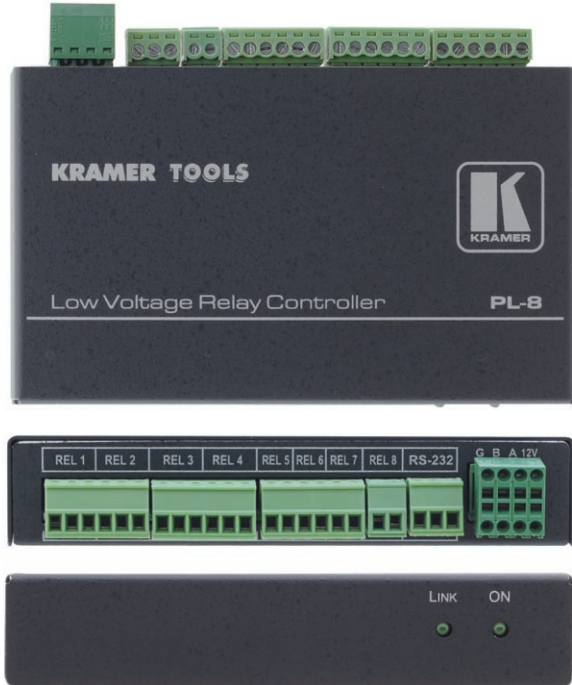


The **PL-8** is a high-performance relay controller. The unit connects to up to 8 devices for the simplified and centralized control of room functions (such as lighting, closing blinds, and so on) over a K-NET™ network.

### FEATURES

- **8 Relays** - For controlling up to 8 devices or room elements, such as blinds, lights, screen, projector lift.
- **Extends SummitView™ Control** - Can be controlled by SV-551, RC-62 and RC-63 and similar compatible control units.
- **K-NET™ Control Channel** - Connects compatible user interfaces and supplies power and control data over a single cable.
- **Indicator LEDs** - LINK indicates active communication, ON indicates power.
- **Firmware Upgrade via RS-232.**
- **Compact Kramer TOOLS™** - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

CONTROL SYSTEMS

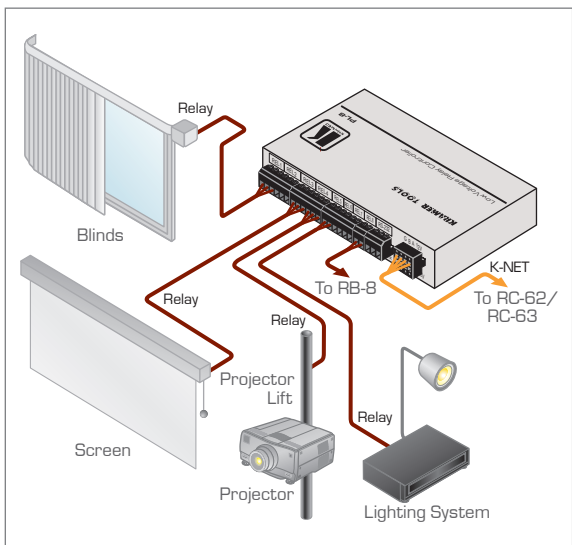

### TECHNICAL SPECIFICATIONS

- INTERFACE:** 2 K-NET™ on terminal block connectors.
- OUTPUTS:** 4 relays on terminal block connectors: NO-normally open, C-common voltage, NC-normally closed (36V AC or DC, 2A, 60V AC maximum on non-inductive load); 4 relays on terminal block connectors: NO-normally open, NC-normally closed (36V AC or DC, 2A, 60V AC maximum on non-inductive load).
- CONTROL LEDs:** LINK and ON.
- POWER SOURCE:** 12V DC, 130mA.
- DIMENSIONS:** 12.1cm x 7.18cm x 2.42cm (4.76" x 2.83" x 0.95") W, D, H.
- WEIGHT:** 0.3kg (0.67lbs) approx.
- ACCESSORIES:** Power supply, mounting bracket.
- OPTIONS:** RK-3T 19" rack adapter.

