

104M


1:4 Dynamic Microphone Distribution Amplifier



The **104M** is a high-quality distribution amplifier for dynamic microphone signals. It takes a microphone input and distributes the signal to four identical line-level outputs.

FEATURES

- Level (Gain) Control.
- Compact Kramer TOOLS™ - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

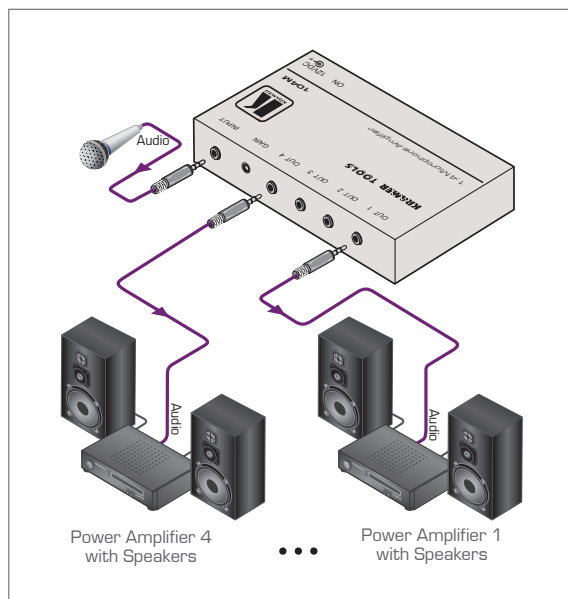

TECHNICAL SPECIFICATIONS

INPUT:	1 mono microphone, 5mVpp/10k Ω on a 6.5mm phone jack.
OUTPUTS:	4 mono line level, 1Vpp/150 Ω on 6.5mm phone jacks.
MAX. OUTPUT LEVEL:	4.8Vpp.
AUDIO BANDWIDTH (-3dB):	37kHz.
GAIN CONTROL:	5dB to 54dB.
S/N RATIO:	78dB.
THD @ 1kHz:	0.1%.
POWER SOURCE:	12V DC, 20mA.
DIMENSIONS:	12cm x 7.5cm x 2.5cm (4.7" x 2.95" x 0.98") W, D, H.
WEIGHT:	0.28kg (0.62lbs) approx.
ACCESSORIES:	Power supply, mounting bracket.
OPTIONS:	RK-3T 19" rack adapter.

