




The VS-4X is a high-performance switcher for balanced stereo audio signals on XLR connectors. It switches any one of four stereo signals to a single stereo output.

## FEATURES

- Mechanical (Passive) Switching No power required.
- Desktop Size Compact size. 2 units can be rack mounted side-by-side in a 2U rack space with the optional RK-4X adapter.

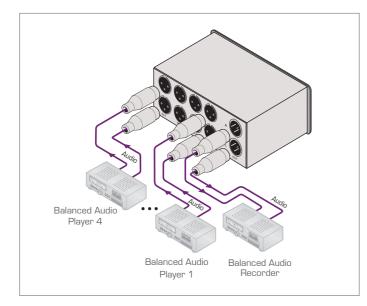

## TECHNICAL SPECIFICATIONS

INPUTS:

OUTPUT:

SWITCHING SYSTEM: BANDWIDTH (-3dB): CROSSPOINTS: SIGNAL LEVELS: DIMENSIONS: 4 balanced stereo audio, +4dBu typical, on XLR connectors. 1 balanced stereo audio, +4dBu typical, on XLR connectors. Mechanical, break-before-make. 100kHz (audio). 4 x 2 for audio stereo. Up to +30dBu. 15.3cm x 6.6cm x 7.6cm (6" x 2.6" x 3") W, D, H. 0.57kg (1.27lbs) approx. RK-4X 19" rack adapter.

WEIGHT: OPTIONS:

> KRAMER ELECTRONICS, Ltd DIRECTORY OF PRODUCTS 2011/2012 WWW.KRAMERELECTRONICS.COM

SWITCHERS & ROUTERS | SINGLE OUTPUT | AUDIO ONLY

KRADA

2.49