








The VA-11 is a high-performance device that combines composite video and unbalanced stereo audio signals into a single signal for transmission over a single coax cable. The signal is separated back into composite video and stereo audio when used with the VA-12 separator.

FEATURES

- Bandwidth 7MHz (-3dB).
- Input 1 composite video and 1 unbalanced stereo audio.
- Output 1 single signal of the combined audio and composite
- Desktop Size Compact size. 2 units can be rack mounted sideby-side in a 1U rack space with the optional RK-1 adapter.

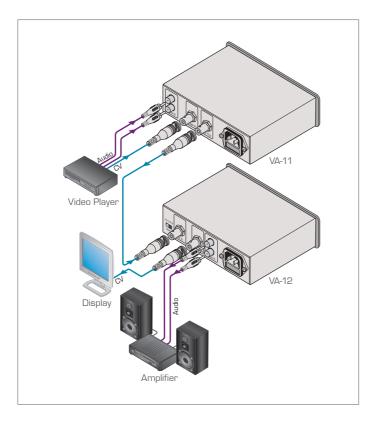

TECHNICAL SPECIFICATIONS

INPUT: 1 composite video, $1Vpp/75\Omega$ on a BNC type connector; 1 stereo audio,

1Vpp/10kΩ on RCA connectors.

OUTPUT: 1 mixed signal 1Vpp/75 Ω on a BNC

connector. 7MHz. 0.4%.

DIFF. GAIN: DIFF. PHASE: 0.17Deg. VIDEO S/N RATIO:

BANDWIDTH (-3dB):

POWER SOURCE: 230V AC, 50/60Hz (115V AC, USA),

4.1VA.

DIMENSIONS: 16.5cm x 12cm x 4.5cm

(6.5" x 4.7" x 1.8") W, D, H. O.78kg (1.7lbs) approx. WEIGHT: ACCESSORIES: Power cord.

OPTIONS: RK-1 19" rack adapter.

