








The VM-1055 is a high-performance distribution amplifier for RGBHV video signals. It provides correct buffering and isolation and distributes the signal to five identical outputs.

FEATURES

- High Bandwidth 300MHz (-3dB).
- HDTV Compatible.
- Selectable Sync input Termination 75Ω (video), 510Ω (Graphics/TTL).
- Standard 19" Rack Mount Size 1U.

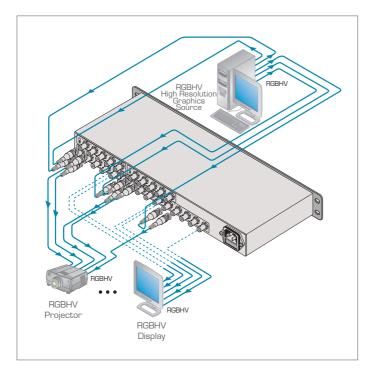

TECHNICAL SPECIFICATIONS

INPUTS: 1x5 component/RGBHV/composite video, $1Vpp/75\Omega$ on BNC connectors,

(2 of them can be either video or SYNC 1Vpp/75 Ω or TTL level/510 Ω). 5x5 component/RGBHV/composite

OUTPUTS: video, $1Vpp/75\Omega$ on BNC connectors (2 of them can be either video or SYNC 1Vpp/75 Ω or TTL level/510 Ω).

2Vpp. 300MHz. MAX. VIDEO OUTPUT: VIDEO BANDWIDTH (-3dB): DIFF. GAIN: 0.1%. DIFF. PHASE: O.1Deg. K-FACTOR: <0.05%

VIDEO S/N RATIO: Better than 74dB. COLIPLING: DC

NONLI INFARITY: 0.1%

230V AC 50/60Hz (115V USA), POWER SOURCE:

5.3VA.

19" x 7" x 1U W, D, H, rack DIMENSIONS:

mountable.

2.6kg (5.7lbs) approx. WEIGHT:

ACCESSORIES: Power cord.

