

VP-701xl

Computer Graphics Video & HDTV Scan Converter




Compatible with HDTV component video signals when used with a breakout cable such as the Kramer C-GM/3RVF.



The **VP-701xl** is a scan converter for computer graphics video signals. The unit converts computer graphics video signals up to 2048x2048 or HDTV signals up to 1080p to two composite and two s-Video (Y/C) signals simultaneously in either PAL or NTSC formats.

FEATURES

- HDTV Compatible.
- Input - 15-pin HD for computer graphics or HDTV signals.
- Output - 2 CV on BNC connectors, 2 Y/C on 4-pin connectors.
- Input Compatibility - Up to 2048x2048 and 1080p.
- Multi-Standard Output - PAL or NTSC (selectable).
- AutoTrak™ Auto Set Up Technology - One button auto setup that automatically sizes, shifts, and centers any input image on the display device.
- Looping Input.
- Built-In ProcAmp - Brightness, contrast, color, hue (NTSC only).
- Flicker Reduction - 2, 4 or 6-line flicker reduction (selectable).
- Freeze Frame.
- Front Panel Lock Out.
- Aspect Ratio - 3 settings.
- Zoom & Pan - To 10x.
- Control - RS-232 (for firmware updates) & IR remote (included) with on-screen display.
- Power Supply - 12V DC.
- Desktop Size - Compact size. Can be rack mounted in a 1U rack space with the optional RK-701xl adapter.

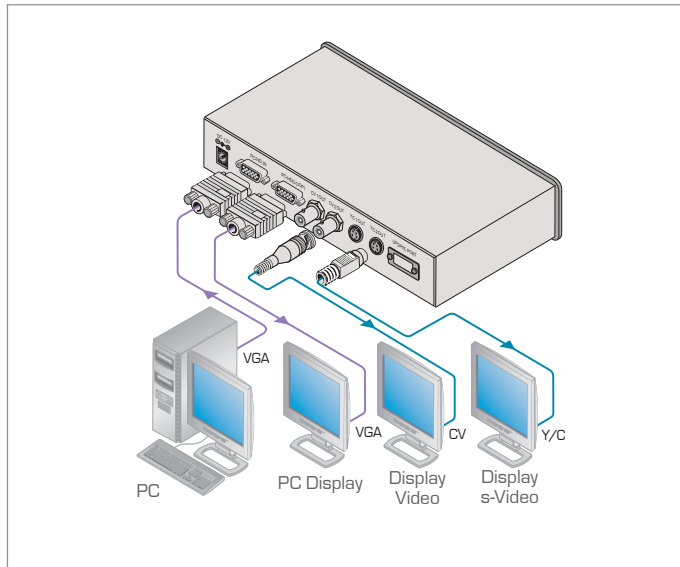

TECHNICAL SPECIFICATIONS

INPUT:	1 computer graphics or component HDTV on a 15 pin HD (F) connector plus loop.
OUTPUT:	NTSC or PAL (selectable); 2 CV on a BNC connector; 2 s-Video on a 4-pin connector.
INPUT RESOLUTION:	Up to 2048x2048 (computer) and 1080p (HDTV). 24-100kHz H-Freq & 40-150Hz V-Freq.
CONTROLS:	Front panel, IR, and RS-232.
POWER SOURCE:	12V DC.
DIMENSIONS:	21.85cm x 15.0cm x 4.2cm (8.6" x 5.9" x 1.65") W, D, H. 0.6kg (1.3lbs) approx.
WEIGHT:	
ACCESSORIES:	Power supply.
OPTIONS:	RK-701xl 19" rack adapter.

