

FC-46


HDMI Audio De-embedder



The **FC-46** is a high-performance HDMI audio de-embedder. It accepts an HDMI input signal and de-embeds the audio signal to S/PDIF and TOSLINK® audio outputs.

FEATURES

- Max. Data Rate - Up to 1.65Gbps.
- HDCP Compliant.
- HDTV Compatible.
- Looping Input.
- I-EDID™ Kramer Intelligent EDID Processing™ - Intelligent EDID handling & processing algorithm ensures Plug and Play operation for HDMI systems.
- Auto Format Detection - Digital RGB or YPbPr.
- Compact Kramer TOOLS™ - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

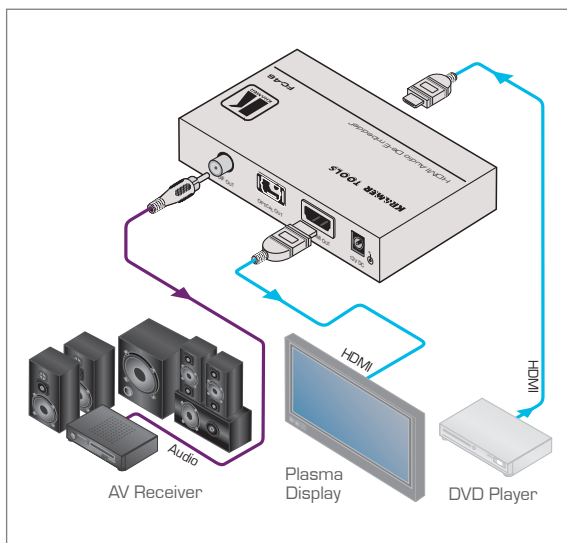

TECHNICAL SPECIFICATIONS

INPUT:	1 HDMI connector.
OUTPUT:	1 HDMI connector; 1 TOSLINK® optical connector; 1 S/PDIF (digital audio) on an RCA connector.
OPERATION FREQUENCY:	Supports up to 1.65Gbps (1080p @60Hz).
COMPLIANCE WITH HDMI STANDARD:	Supports HDMI, HDCP 1.0.
CONTROLS:	EDID button.
INDICATOR LEDs:	Power (ON), Input detect (IN), Output detect (OUT).
POWER SOURCE:	12V DC, 180mA.
DIMENSIONS:	12cm x 7.2cm x 2.4cm (4.73" x 2.83" x 0.95") W, D, H.
WEIGHT:	0.3kg (0.67lbs) approx.
ACCESSORIES:	Power supply, bracket installation kit.
OPTIONS:	RK-3T 19" rack adapter.

