

910

Digital Audio Preamplifier & Mixer

NEW




The 910 is a high-performance audio preamplifier and mixer for balanced and unbalanced stereo audio, S/PDIF digital audio, and microphone signals. The unit processes the signals, and outputs them to balanced, unbalanced and S/PDIF outputs simultaneously.

FEATURES

- ProcAmp Control - Volume, balance, bass, mid, treble, loudness, equalizer, delay, mute, expand and compress.
- Mic Input Controls - Selectable condenser or dynamic mic with talkover, mix and override controls.
- LCD Display - 24-character by 2-line display.
- USB Port - For firmware update.
- Flexible Control Options - Front panel, RS-232 (K-Router™ Windows®-based software is included), Ethernet, IR remote (included) and K-NET™.
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.

TECHNICAL SPECIFICATIONS

INPUTS:	1 unbalanced stereo audio on a RCA connector; 1 balanced stereo audio on a 5-pin terminal block; 1 S/PDIF on an RCA connector; 1 mono balanced microphone on an XLR (F) connector.
OUTPUTS:	1 unbalanced stereo audio on a RCA connector; 1 balanced stereo audio on a 5-pin terminal block; 1 S/PDIF on an RCA connector.
OUTPUT LEVEL:	8Vpp.
BANDWIDTH (-3dB):	21.7kHz.
S/N RATIO:	75dB @1kHz, weighted.
CONTROLS:	Volume: <-75 to +23.5dB; Bass:-15 to +15dB @100Hz; Mid:-20 to +20dB @1kHz; Treble:-10 to +10dB @20kHz; Loudness:+10.6dB @50Hz, +4.3dB @1kHz, +6.8dB @20kHz; Balance:<-64 to 0dB @1kHz; Delay:90usec to 300usec; Expand:+23.8dB @1kHz; Compress:-3.3dB @1kHz.
COUPLING:	AC.
AUDIO THD + NOISE:	0.1% @1kHz.
AUDIO 2nd HARMONIC:	0.03% @1kHz.
POWER SOURCE:	90-264V AC, 50/60Hz, 9VA.
DIMENSIONS:	19" x 7" x 1U W, D, H, rack mountable.
WEIGHT:	2.0kg (4.4lbs).
ACCESSORIES:	Power cord, null-modem adapter, Windows®-based Kramer control software, rack "ears", IR remote control transmitter.

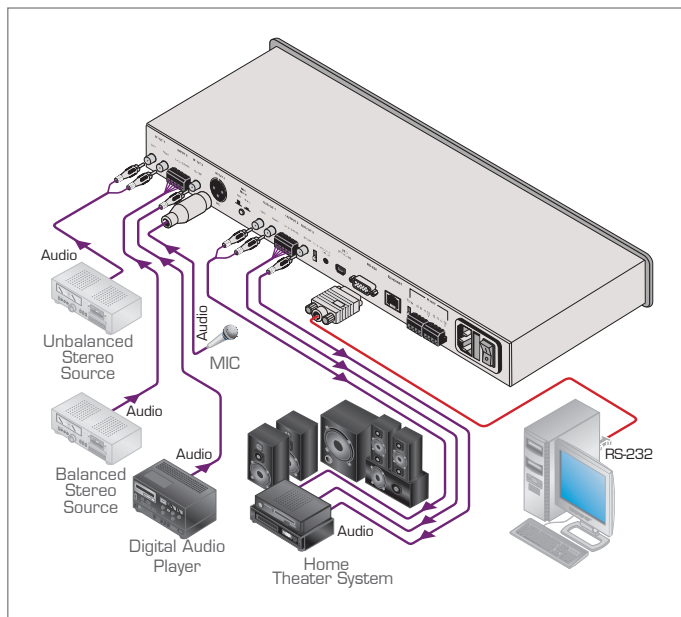

SPECIALTY AV PRODUCTS

